
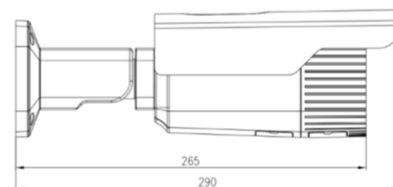


IP Camera Specification

Model : VP-IPC-IRQ3400MCP



4.0MP H.265+ Bullet Motorized Lens IP Camera

Model		VP-IPC-IRQ3400MCP
Camera	Sensor	1/3" 4.0Mega progressive scan CMOS
	Min.illumination	Color: 0.1Lux@F1.2 (AGC ON) ; 0Lux@F1.2 (AGC ON) with IR
	Lens	2.8-12mm Motorized Lens
	IR Range	50m
	Electronic Shutter	Auto (1/25s ~ 1/10000s)
	Day / Night	Auto / Color / B&W (IR CUT)
	DNR	2D/3D DNR (Auto / Manual)
	Anti-Fog	Support (ON/OFF)
	WDR	DWDR
	BLC	Support
Image Adjustment	Sharpness, Brightness, Saturation, Contrast Adjustable	
Encode	Video Encoding	H.265+, H.265 Main Profile/H.264 High Profile/H.264 Main Profile/H.264 BaseLine Profile
	Max Resolution	Main Stream : 2560*1440@25fps
	Triple Stream	Sub Stream : 704*576@20fps ; The Third Stream : 1280*720@15fps
	Video Bitrate Control	Support VBR / CBR
	Video Bitrate Range	32Kbps~8MKbps
	Audio Encoding	G.711A/G.711Mu/G.726
	Audio Bitrate Range	G.711A (64Kbps) /G.711Mu (64Kbps) /G.726 (16Kbps)
	Reduce Echo	Support
	Noise Filtering	Support
	Other Audio Function	Support Automatic Gain Adjustment; Audio Input/Output Volume Adjustable
Interface	Audio	1 Audio Input, 1 Audio Output.
	Alarm	1 Alarm Input, 1 Alarm Output.
	Local Storage	Support Micro SD/SDHC/SDXC (128G)
	RS485	Support
	Reset	Built-in Reset Button
	Analog Output	1ch BNC Analog Output
	Network Port	1 RJ45 10M/100M Ethernet interface
	Function	Motion Detection
Corridor Mode		Support
General Parameter	ROI	Support
	Privacy Masking	4 Zones for Privacy Masking
	Snapshot	Support JPEG, Resolution is the max encoding resolution
	Security Features	Support password, watermarking
	Text Overlay	Support (Channel name、 Date&Time)
	Alarm	Support network anomaly, mask alarm and etc.
	Intelligent Function	Face Detection, Intrusion Detection, Object Missing/Left Detection, Through Fence Detection, Retrograde Detection, Loitering Detection , Density Detection, Counting, Color Cast, Car License Detection , Out of Focus Detection, Camera Movement Detection.
	Mobile Phone APP	Support IOS and Andriod
	Network Protocol	TCP/IP ; UDP ; HTTP ; IGMP ; ICMP ; DHCP ; RTP/RTSP ; DNS ; DDNS ; FTP ; NTP ; PPPOE ; UPNP ; SMTP
	Protocol	ONVIF/CGI/GB28181
General Parameter	Protection Grade	IP67
	Power Supply	DC12V (± 25%) / POE
	Working Temperature	-40°C-- + 60°C (*Start up should be done at above -40°C)
	Humidity	10%--90%
	Power	10 W MAX
	Install Type	Bracket Installation, Wall / Ceiling Mounting
	Size	98*96*265 (mm)
Weight	1200g	