

Your Reliable Partner
for Quality Gate Automation

DFT
AUTOGATE OPERATOR



20ft+
Heavy Duty
Capacity

COMMERCIAL-STRENGTH AUTOGATE ARM

20ft+ HEAVY-DUTY CAPACITY




Heavy-Duty
Strength

Commercial
Capacity 20f+

Proyen
Ultra-Silent
Motor

IMPROVES SECURITY | UNBEATABLE VALUE | CONVENIENT | PEACE of MIND | SAVES TIME

DFT SERIES

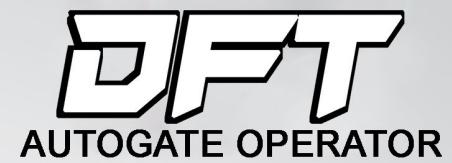

Technical Characteristics

| | |
|---------------------|---------------|
| Code | DFT X6 |
| Power supply | 230 VAC |
| Motor voltage | 24 VDC |
| Current input | 0.5 A |
| Leaf max dimension | 5 M |
| Working temperature | -20°C / +50°C |
| Max weight of gate | 750kg |
| Backup Batery | 12 DC 7AH |
| Travel Time (sec) | 8-12 sec |
| Weight | 11kg |
| Max opening angel | 110° |
| Dual speed | Yes |

* Specification is subject to change without prior notice


Control Panel and Accessories




Manufactured by ISO:9001:2008
Certified Company




Product Dimensions

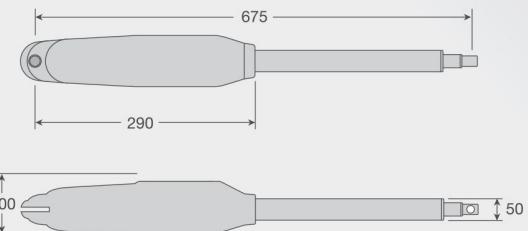

Installation Outlook

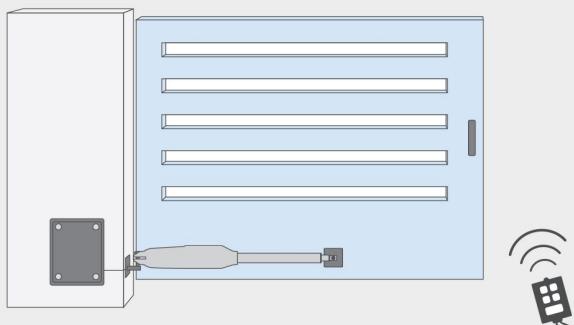

Overall Installation Guide

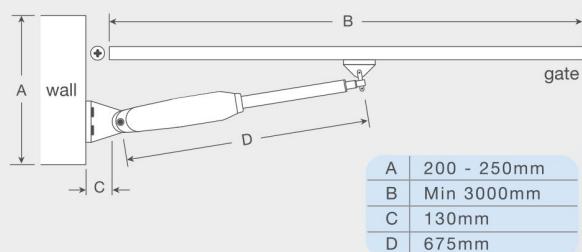

For enquiries please contact