


Your Reliable
Partner for
Quality Gate Automation

DFT
AUTOGATE OPERATOR

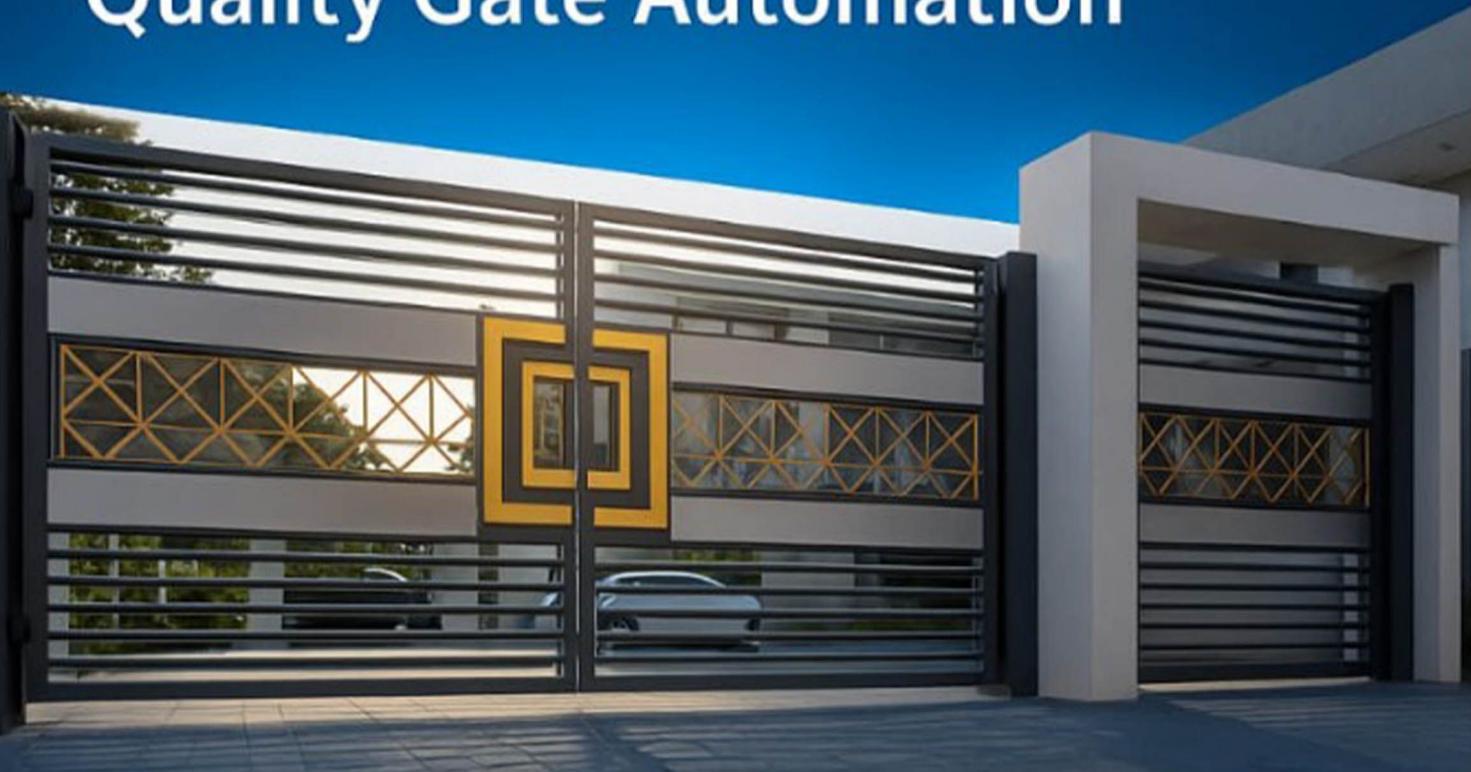

New Technology Stainless Steel
Arm Gate Opener with
Ultra-Silent Motor

Model: X1+



Swing Gates



Folding Gates



Reliable

IMPROVES SECURITY | UNBETABLE VALUE | CONVENIENT | SAVES RELIABLE

DFT SERIES

DFT
AUTOGATE OPERATOR

Technical Characteristics

| | |
|---------------------|--|
| Driving Method | Electro - mechanical screw screw driver piston type |
| Operating Voltage | DC 18 V for normal speed DC12 V for ending speed |
| Motor Output | 15 watt per arm |
| Motor Amp. | 2.1 |
| Piston Displace | 32 cm |
| Piston Speed | 2.9 cm/sec |
| Back-up Battery | 12 volt. 7AH Rechargeable |
| Safety Clutch | Electric current sensing using Hi-Amp Auto-Reverse stop. |
| Safety Barrier | Infrared beam sensor (optional) |
| Electric Controller | Micro-processor based |

* Specification is subject to change without prior notice

Control Panel and Accessories



ISO 9001
BUREAU VERITAS
Certification



Manufactured by ISO:9001:2008
Certified Company




BUATAN MALAYSIA
MADE IN MALAYSIA


Product Dimensions



Installation Outlook

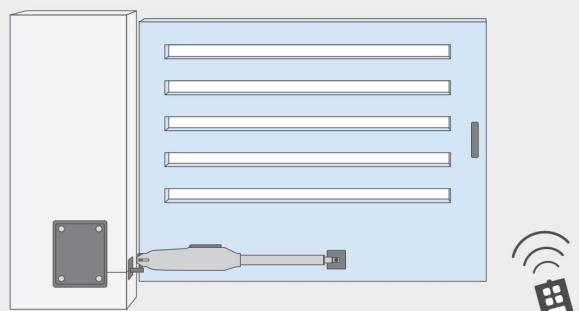

Overall Installation Guide

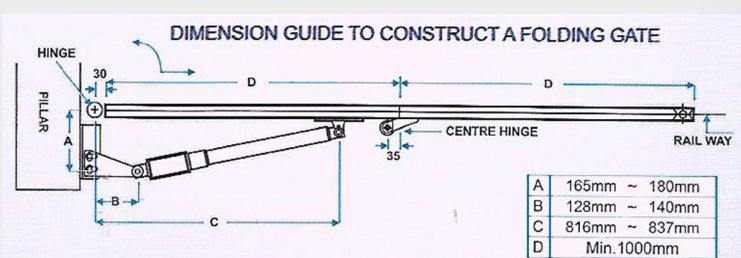

For enquiries please contact