


Your reliable option
for quality gate automation

DFT
AUTOGATE OPERATOR

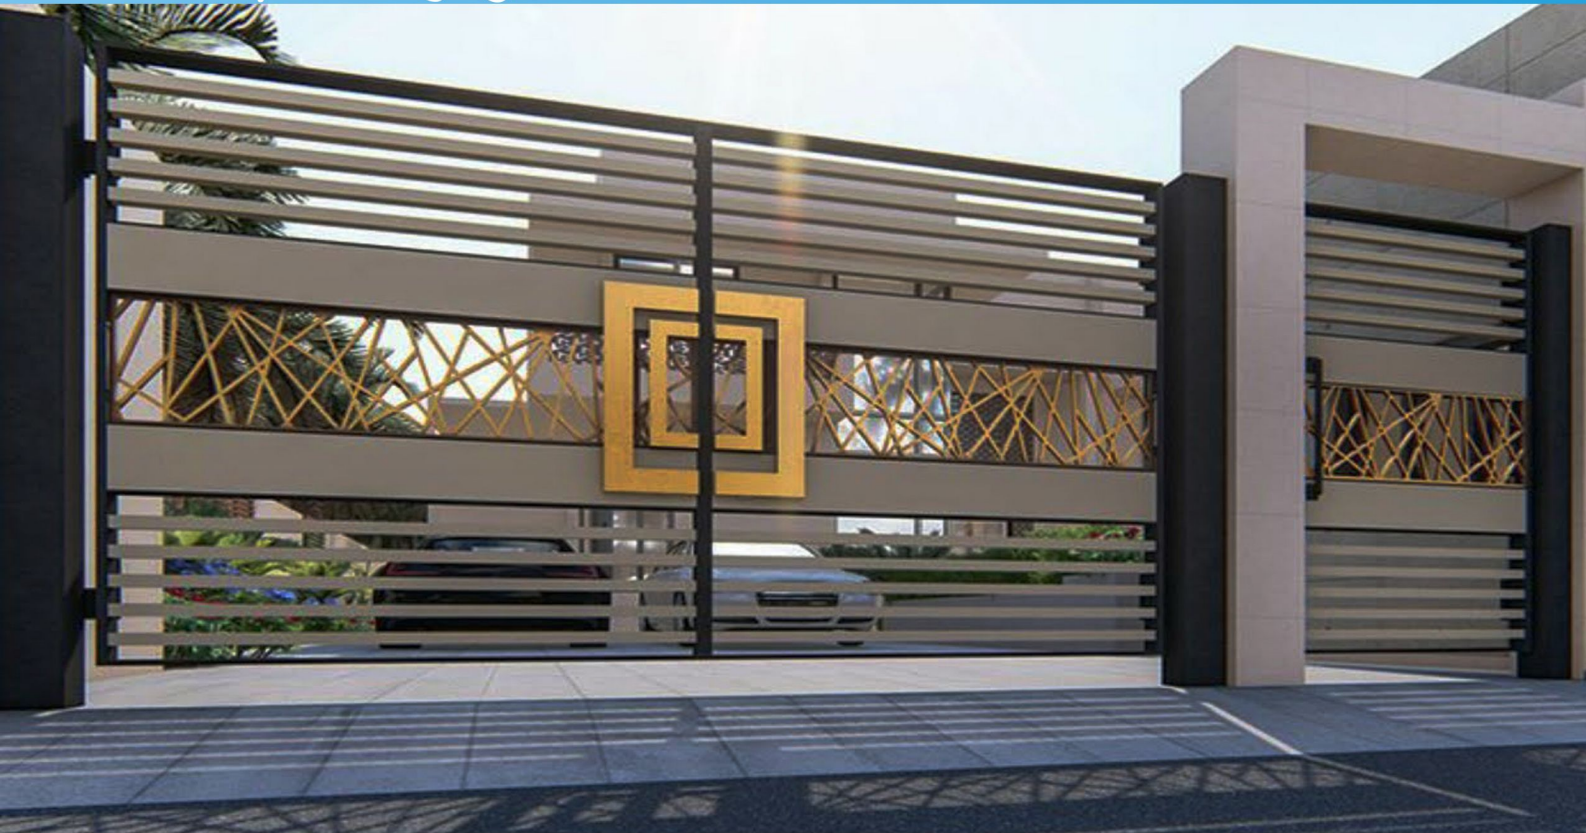

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR



model: **X1**



DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR



Adjustable Bracket

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR



Swing Gates



Folding Gates

IMPROVES SECURITY | UNBEATABLE VALUE | CONVENIENT | PEACE OF MIND | SAVES TIME | RELIABLE


DFT SERIES

DFT
AUTOGATE OPERATOR


Technical Characteristics

Driving Method	Electro - mechanical screw driver piston type
Operating Voltage	DC 18 V for normal speed DC12 V for ending speed
Motor Output	15 watt per arm
Motor Amp.	2.1
Piston Displace	32 cm
Piston Speed	2.9 cm/sec
Back-up Battery	12 volt. 7AH Rechargeable
Safety Clutch	Electric current sensing using Hi-Amp Auto-Reverse stop.
Safety Barrier	Infrared beam sensor (optional)
Electric Controller	Micro-processor based

Product Dimensions

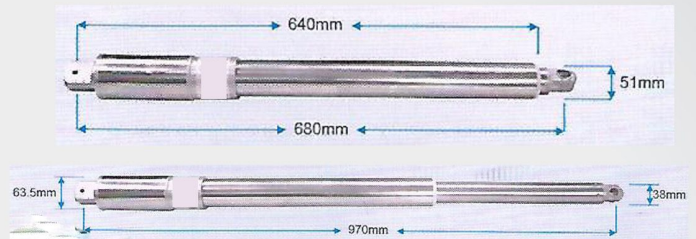

Installation Outlook

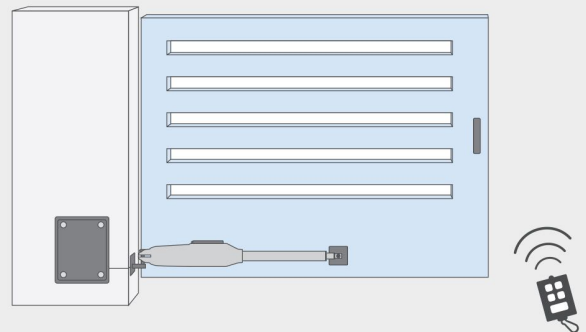


* Specification is subject to change without prior notice

Control Panel and Accessories



Overall Installation Guide

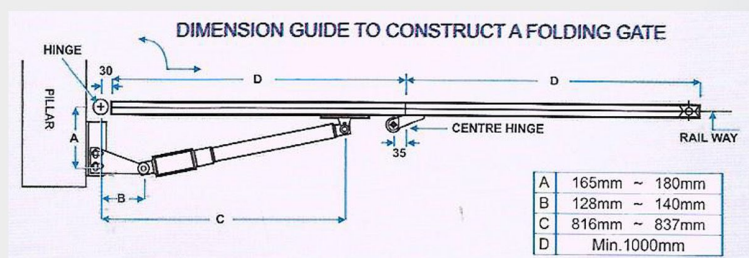

For enquiries please contact

ISO 9001
BUREAU VERITAS
Certification



Manufactured by ISO:9001:2008
Certified Company



BUATAN MALAYSIA
MADE IN MALAYSIA

www.amware.com.my