

Your reliable option
for quality gate automation

DFT
AUTOGATE OPERATOR



DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR



model: **X1**



DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR

DFT
AUTOGATE OPERATOR



Adjustable Bracket



Swing Gates



Folding Gates

IMPROVES SECURITY | UNBEATABLE VALUE | CONVENIENT | PEACE OF MIND | SAVES TIME | RELIABLE


DFT SERIES

DFT
AUTOGATE OPERATOR


Technical Characteristics

Driving Method	Electro - mechanical screw driver piston type
Operating Voltage	DC 18 V for normal speed DC12 V for ending speed
Motor Output	15 watt per arm
Motor Amp.	2.1
Piston Displace	32 cm
Piston Speed	2.9 cm/sec
Back-up Battery	12 volt. 7AH Rechargeable
Safety Clutch	Electric current sensing using Hi-Amp Auto-Reverse stop.
Safety Barrier	Infrared beam sensor (optional)
Electric Controller	Micro-processor based

Product Dimensions

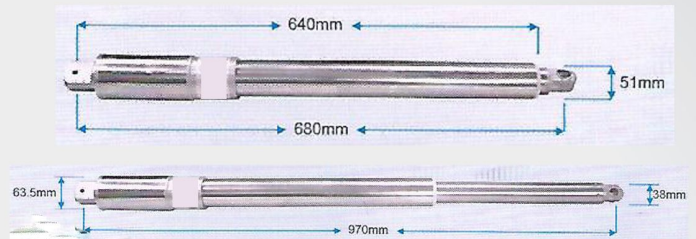

Installation Outlook

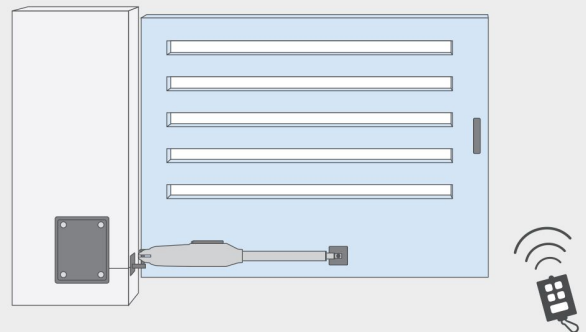


* Specification is subject to change without prior notice

Control Panel and Accessories



Overall Installation Guide

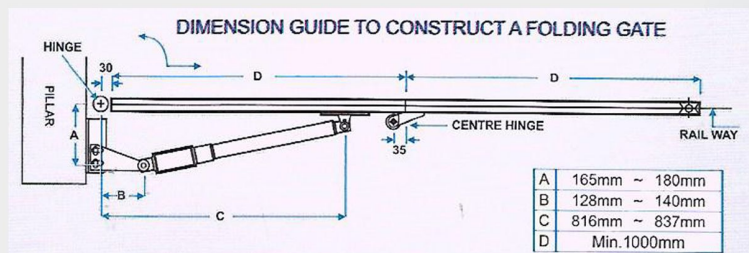

For enquiries please contact

ISO 9001
BUREAU VERITAS
Certification



Manufactured by ISO:9001:2008
Certified Company

BUATAN MALAYSIA
MADE IN MALAYSIA

www.amware.com.my