

# 3MP PoE

## Dual-light Bullet IP Camera EQY Series

### IPC-EQY8330PGH-IR2R-PAT



#### Introduction


IPC-EQY8330PGH-IR2R-PAT is a waterproof bullet network camera, suitable for places with low or no light conditions and high definition image quality, such as roads, warehouses, underground parking lots, bars, pipelines, parks, etc.



Human Detect Spotlight



#### Dimension

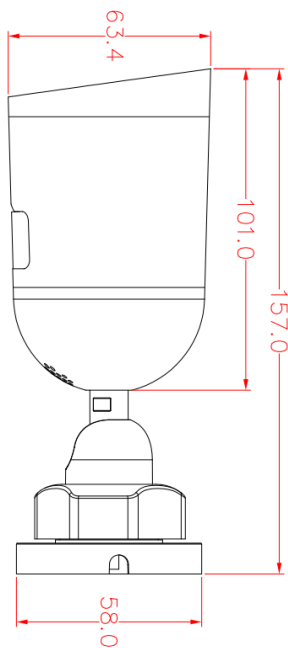

#### Main Features



HD Lens



PoE



Multi-Platform Support



IP66 Waterproof



Human detection



Onvif



Automatic electronic shutter



Automatic ICR



Face Detection



Mobile Monitoring



Voice intercoms



Double light alert

## Product Parameters

### Model IPC-EQY8330PGH-IR2R-PAT

#### Camera

Sensor	1/2.9" low illumination CMOS sensor
illumination	Color:0.01Lux @(F1.2,AGC ON);0 Lux with IR B/W:0.001 Lux @ (F1.2,AGC ON);0 Lux with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	HD lens 2.8/3.6/6mm(optional)
Lens Mount	M12
Day&Night	IR cut filter with auto switch

#### Image

Max resolution	2304*1296
Frame Rate	2304*1296@20fps, 1920*1080@20fps
Setting	Saturation, brightness and contrast are adjustable through IE browser or client software.

#### Compression

Video Encoding	H.265Acompatible H.265/H.264) HighProfile, JPEG snapshot
Bite Rate	0.1Mbps~8Mbps
Audio Encoding	G.711a

#### Network

Storage	Network storage
Alarm	Face detection , human detection, Motion detection, video loss, video block, etc.
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (HTTPS, SIP, 802.1x, IPv6 option
Features	anti-flicker, dual-stream, heartbeat, password protection

#### General

Temperature	-10°C- +60°C
Humidity	10%-90% RH
Power	DC12V±10%/POE
IR Range	4*( White Light+Infrared Light),"IR2":20-30 meters
Consumption	MAX 3W
Material	ABS+ PC plastic
waterproof	IP66
Weight	Around 300g
Dimension	Φ63.37mm*157.2mm

#### Interface

Ethernet	1*10/100Mbps Ethernet port, RJ45 port
Audio I/O	1/1 (Built-in mic/speaker)