


AHC-EQI5350PSC-X-IR2R

AHD 5.0MP Bullet dual-light Camera EOI Series

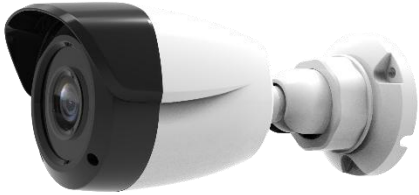

Features:

- 5.0MP 1/2.7" low illumination CMOS sensor;
- HD 5MP Resolution, Image clear, Delicate;
- HD lens:2.8mm;
- Day/Night(Auto ICR);
- Auto electronic shutter time;
- IR range: 2*Infrared lamps 2*white light 20m-30m;
- Ingress Protection: IP66;
- 500 m transmission without delay;
- Support XVI,AHD, TVI, CVI,CVBS
- Standard coaxial control
- Support coaxial upgrade
- Support XVI
- infrared/white light dual-light intelligent switching

Scenarios:

Apply to roads, warehouses, underground parking and other place which required definition picture quality.


Model:

AHC-EQI5350PSC-X-IR2R

Parameters:

Camera	Model	AHC-EQI5350PSC-X-IR2R
	Sensor	5.0MP 1/2.7" low illumination CMOS sensor
	Signal	XVI/ AHD/TVI/CVI @5MP; CVBS@960H
	Min. illumination	Color: 0.01Lux @(F1.2,AGC ON); 0 Lux with IR B/W: 0.001 Lux @ (F1.2,AGC ON),0 Lux with IR
	Shutter time	1/50(1/60)s to 1/10,000 s
	Lens	HD lens 2.8mm @F2.2
	Lens mount	M12
	Day&night	IR cut filter with auto switch
	Max.image reolution	2560*1920
	Interface	Video output
Audio I/O		N/A
General	temperature	-10°C- + 60°C
	humidity	10%-90% RH
	Power supply	DC12V±10%
	IR range	2*Infrared lamps 2*white light 20m-30m
	Consumption	MAX 3W
	Material	ABS plastic
	Ingress Protection	IP66
	Weight	Around 170g
Dimension	φ69mm*156mm	

Dimension :

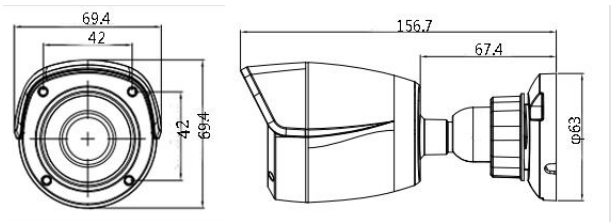

**Human
Detect
Spotlight**