

IPC-HX8340PN-IR2R-PA

H.265 4.0MP PoE Whelk IP Camera HX Series



ACTIVE
Deterrence

Feature:

- 1/3" Low illumination CMOS sensor;
- HD 4MP Resolution, Image clear, Delicate;
- HD lens: 3.6mm@F2.0 (2.8/6mm optional);
- Day/Night(Auto ICR);
- Auto electronic shutter time;
- IR range: 3* Array lamp 20m-30m;
- Support DWDR, 3D DNR;
- H.265A(compatible H.265/H.264) high profile;
- Mobile phone remote monitoring (iOS, Android);
- Multi browser access (IE, Chrome, Firefox, Safari);
- Information superposition (ID, IP, DDNS etc.)
- Support WEB, CMS, VMS, MYEYE, Cloud services;
- Support HVR/NVR, Onvif protocol;
- Support POE;


Scenarios:

Apply for road,warehouse,underground parking lot,bar,pipeline and somewhere where require HD images but with dark light and poor sunshine.

Model:

IPC-HX8340PN-IR2R-PA

Dimension:

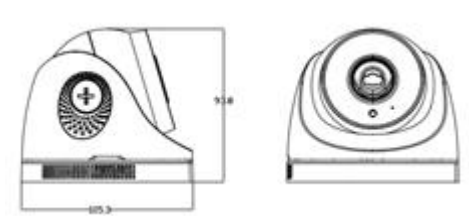

Parameters:

Camera	Model	IPC-HX8340PN-IR2R-PA
	sensor	1/3" Low illumination CMOS sensor
	Min. illumination	Color: 0.01Lux @(F1.2,AGC ON); 0 Lux with IR B/W: 0.001 Lux @ (F1.2,AGC ON),0 Lux with IR
	Shutter time	1/50(1/60)s to 1/10,000 s
	Lens	HD lens 3.6mm@F2.0(2.8/6mm optional)
	Lens mount	M12
	Day&night	IR cut filter with auto switch
Image	Max.image	2560*1440
	Frame rate	PAL:4M(2560*1440)@25fps 3M(2048*1536)@25fps 1080P(1920*1080)@25fps
		NTSC: 4M(2560*1440)@25fps 3M(2048*1536)@25fps 1080P(1920*1080)@25fps
	setting	Saturation, brightness and contrast are adjustable through IE browser or client software.
Compression	Video compressio	H.265A/H.265+(compatible H.265/H.264) HighProfile, JPEG snapshot
	Bite rate	0.1Mbps~8Mbps
	Audio	G.711a
Network	Storage	Network storage
	Alarm	Face detection, human detection, Motion detection, video loss, video block, etc.
	protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (HTTPS, SIP, 802.1x, IPv6 option)
	Features	anti-flicker, dual-stream, heartbeat, password protection
Interface	Ethernet	1*10/100Mbps Ethernet port, RJ45 port
	Audio I/O	1/0
	SD Card	N/A
General	temperature	-10°C- + 60°C
	humidity	10%-90% RH
	Power supply	DC12V±10%/POE
	IR range	3* Array lamp "IR2" :20-30 meters
	Consumption	MAX 4W
	Material	ABS plastic
	Ingress Protection	N/A
	Weight	Around 216g
	Dimension	105mm*95mm