

IPC-HP8340PN-IR2-PA

H.265 4.0MP Wheelk IP Camera HP Series



Feature:

- 1/3" Low illumination CMOS sensor;
- HD 4M Resolution, Image clear, Delicate;
- HD lens: 3.6mm@F2.0 (2.8/6mm optional) ;
- Day/Night(Auto ICR);
- Auto electronic shutter time;
- IR range: 3 array lamps 20m-30m;
- Ingress Protection: IP67
- Support DWDR, 3D DNR;
- H.265A1(compatible H.265/H.264) high profile;


Scenarios:

Apply for road,warehouse,underground parking lot,bar,pipeline and somewhere where require HD images but with dark light and poor sunshine.

Model:

IPC-HP8340PN-IR2-PA

Dimension:

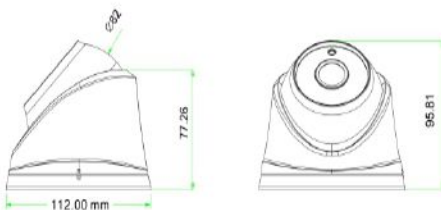

Parameters:

Camera	Model	IPC-HP8340PN-IR2-PA
	sensor	1/3" Low illumination CMOS sensor
	Min. illumination	Color: 0.01Lux @(F1.2,AGC ON); 0 Lux with IR B/W: 0.001 Lux @ (F1.2,AGC ON),0 Lux with IR
	Shutter time	1/50(1/60) s to 1/10,000 s
	Lens	HD lens 3.6mm@F2.0 (2.8/6mm optional)
	Lens mount	M12
	Day&night	IR cut filter with auto switch
	Max.image	2560*1440
	Image	Frame rate
setting		Saturation, brightness and contrast are
Video compressio		H.265A1(compatible H.265/H.264) High Profile, JPEG snapshot
Compression	Bite rate	0.1Mbps~8Mbps
	Audio	G.711a
	Alarm	Face detection,human detection,Motion detection, video loss, video block, etc
	Features	anti-flicker, dual-stream, heartbeat, password protection
	Audio I/O	1/0 (Built-in mic)
	temperature	-10°C - + 60°C
General	humidity	10%-90% RH
	Power supply	DC12V±10%/POE
	IR range	3 array lamps "IR2" :20-30 meters
	Consumption	MAX 3W
	Material	Metal
	Ingress Protection	IP67
	Weight	Around 280g
	Dimension	Φ112mm*77.26mm