


VP-IPC-IRBD2200BP



2.0MP H.265 Dome IP Camera

Model		VP-IPC-IRBD2200BP
Camera	Sensor	1/2.7" 2.0Mega progressive scan CMOS
	Min.Illumination	Color 0.1Lux@F1.2 (AGC ON); 0Lux@F1.2 (AGC ON) with IR
	Lens	3.6mm M12 Lens
	IR Range	20m
	Electronic Shutter	Auto (1/25s ~ 1/10000s)
	Day / Night	Auto / Color / B&W (IR CUT)
	DNR	2D/3D DNR
	Anti-Fog	Support (ON/OFF)
	WDR	DWDR
	Image Adjustment	Sharpness, Brightness, Saturation, Contrast Adjustable
Encode	Video Encoding	H.265 Main Profile/H.264 High Profile/H.264 Main Profile/H.264 BaseLine Profile
	Max Resolution	Main Stream : 1920*1080@25/30fps; Sub Stream: 640*360@25/30fps
	Video Bitrate Control	Support VBR / CBR
	Video Bitrate Range	32Kbps~8Mbps
Interface	Reset	No Reset Button
	Network Port	1 RJ45 10M/100M Ethernet Interface
Function	Motion Detection	Multiple Detection Zones, Variable Sensitivity Levels
	ROI	Support
	Privacy Masking	4 Zones for Privacy Masking
	Snapshot	Support JPEG, Resolution is the max encoding resolution
	Security Features	Support password, watermarking
	Text Overlay	Support (Channel name, Date&Time)
	Alarm	Support network anomaly, mask alarm and etc.
	Mobile Phone APP	Support IOS and Andriod
	Network Protocol	TCP/IP; UDP; HTTP; IGMP; ICMP; DHCP; RTP/RTSP; DNS; DDNS; FTP; NTP; PPPOE; UPNP; SMTP
	Protocol	ONVIF/CGI/GB28181

General Parameter	Protection Grade	IP67
	Power Supply	DC12V (±25%) / POE
	Working Temperature	-40°C-- + 60°C (*Start up should be done at above -40°C)
	Humidity	10%--90%
	Power	4W MAX
	Install Type	Ceiling Mounting
	Size	114.6mm*88mm
	Weight	280g

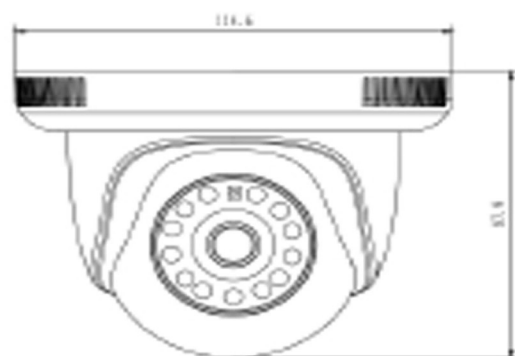

Unit : mm