



WIRING DIAGRAM FOR FOLDING/SWING MOTOR WITH **M1** CONTROL PANEL

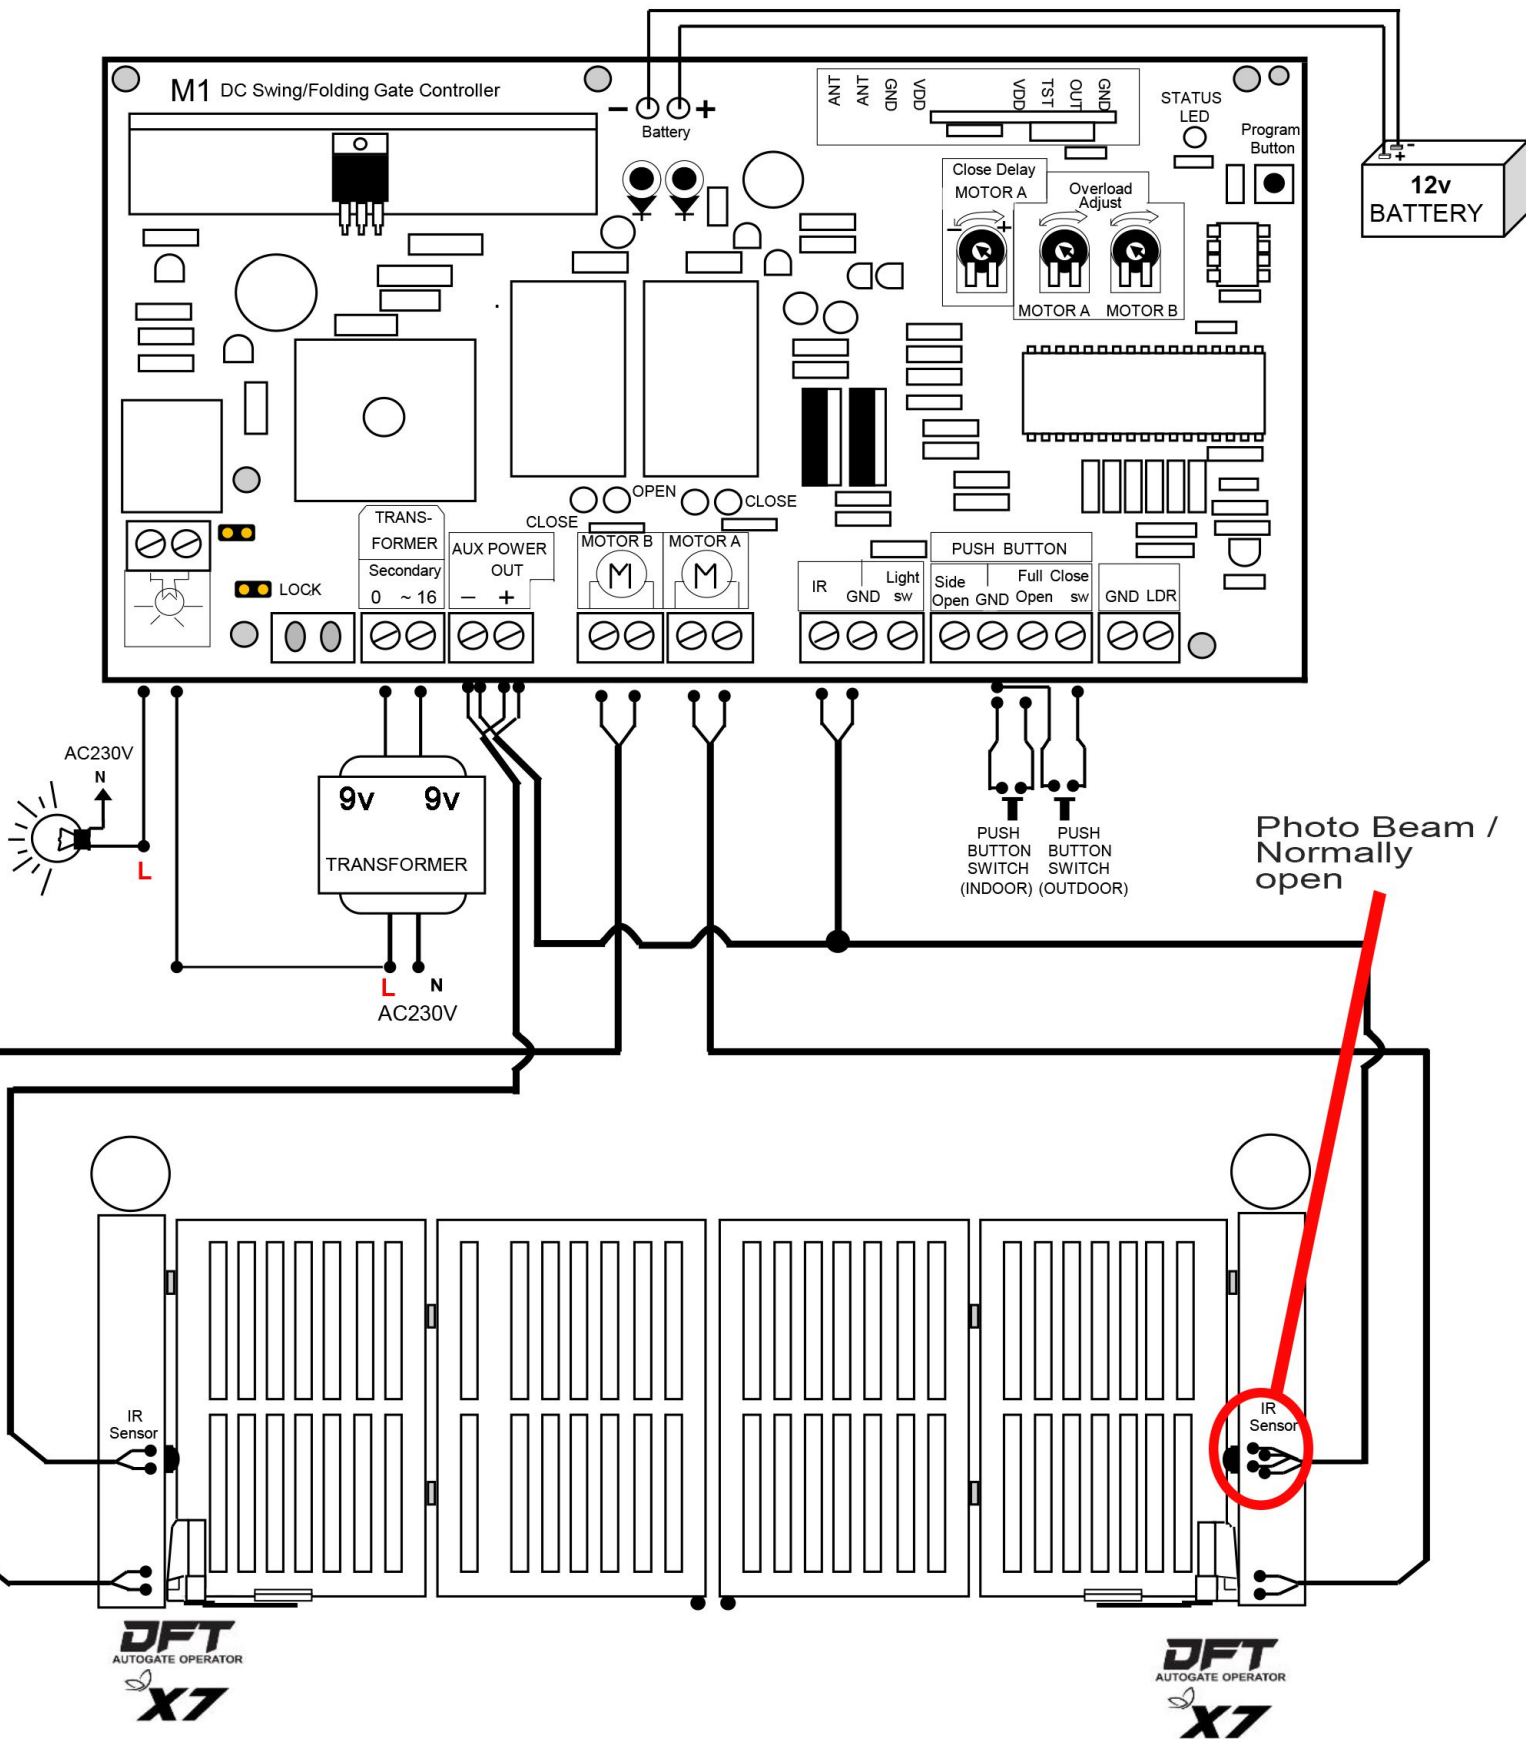

Remote Control Programming Method :


- 1) To Program - Press the "**Program Button**" switch x1 time ,the GREEN LED will ON ,
Then Press the Remote Control (any button), GREEN LED will Blinking
- 2) To Erase - Press and hold the "**Program Button**" switch , 5 -6 second until the LED blinking.

1

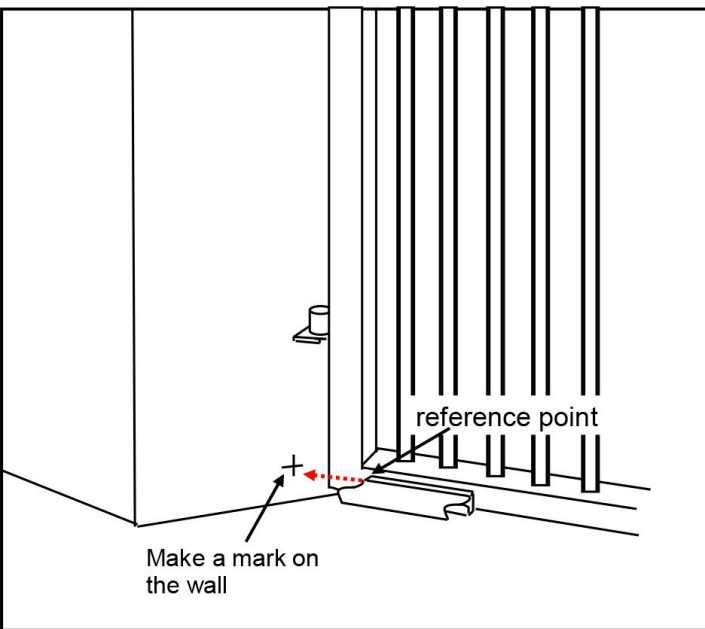


Make a mark on the wall by using the C-channel+base plate

2

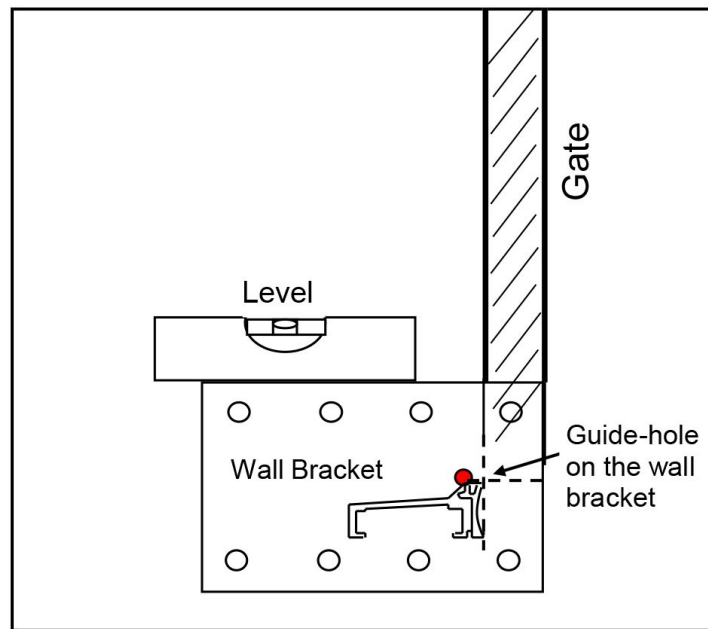


Align the wall bracket guide-hole with the marking point

3

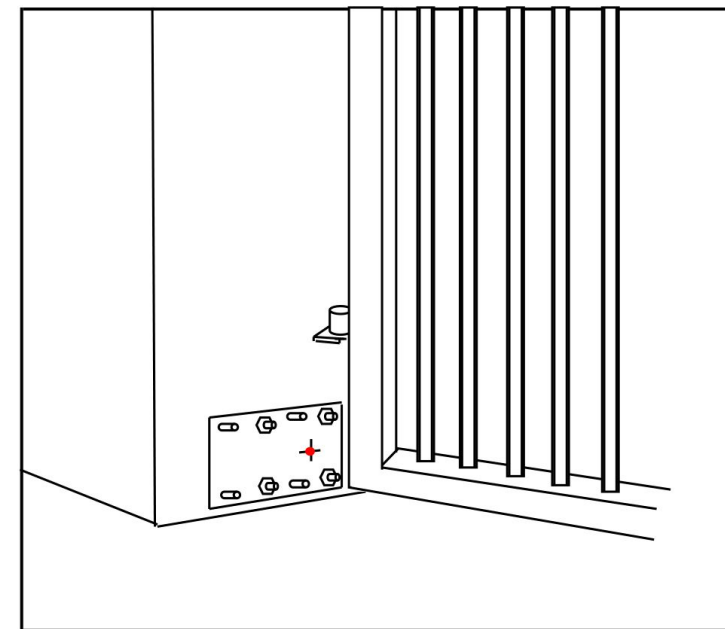


4

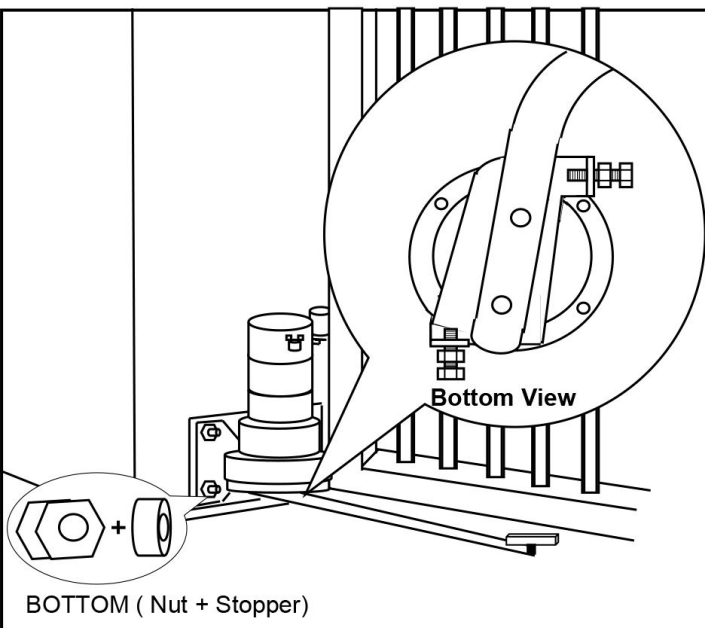


Install the motor & drive bar

5

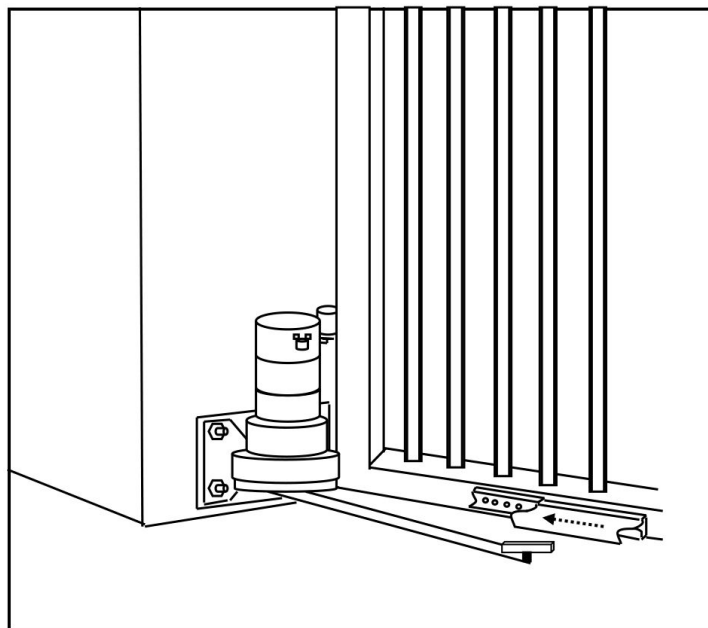

Measure and install the C-channel base plate. Then, Slot in & secure the C-channel

6

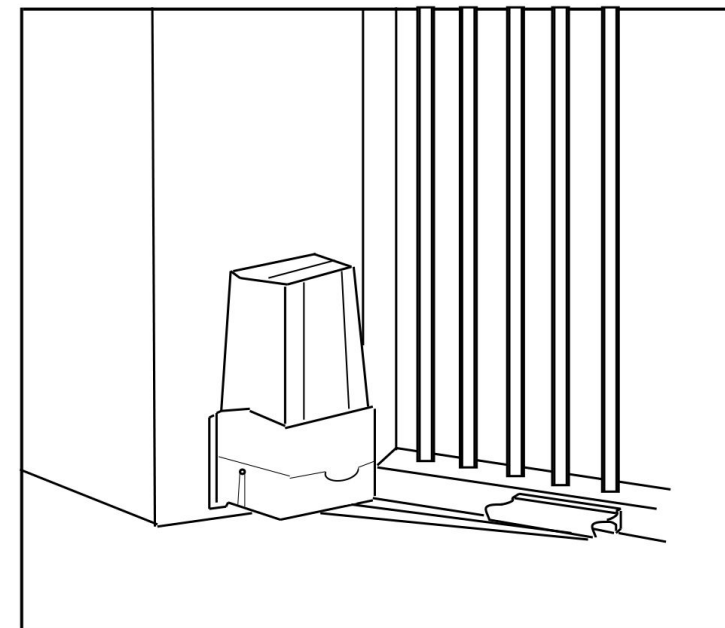


1




WALL Bracket

2

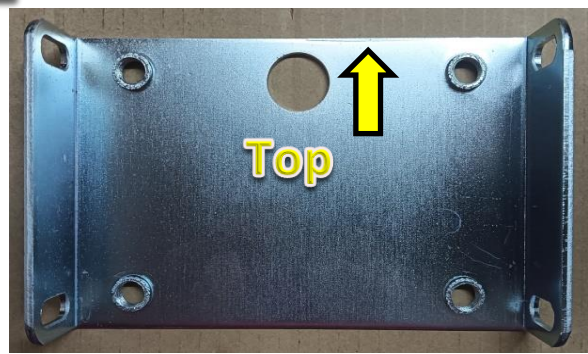

Motor Bracket


3

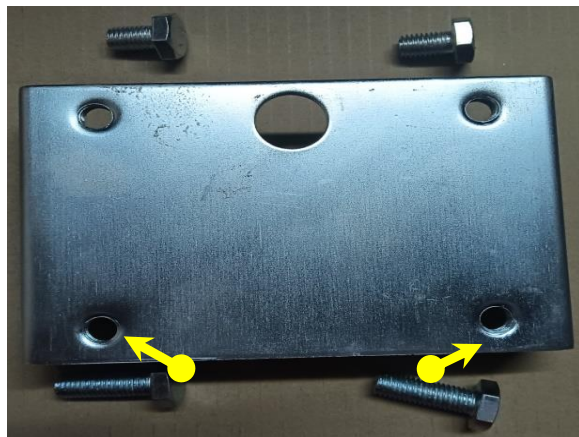

4



5

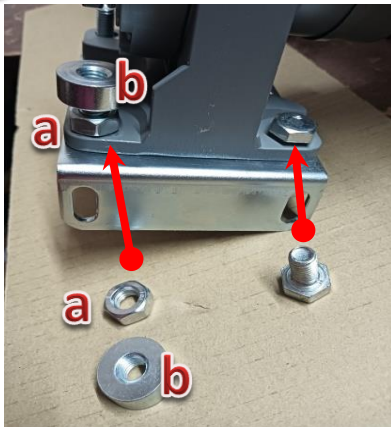



6





7




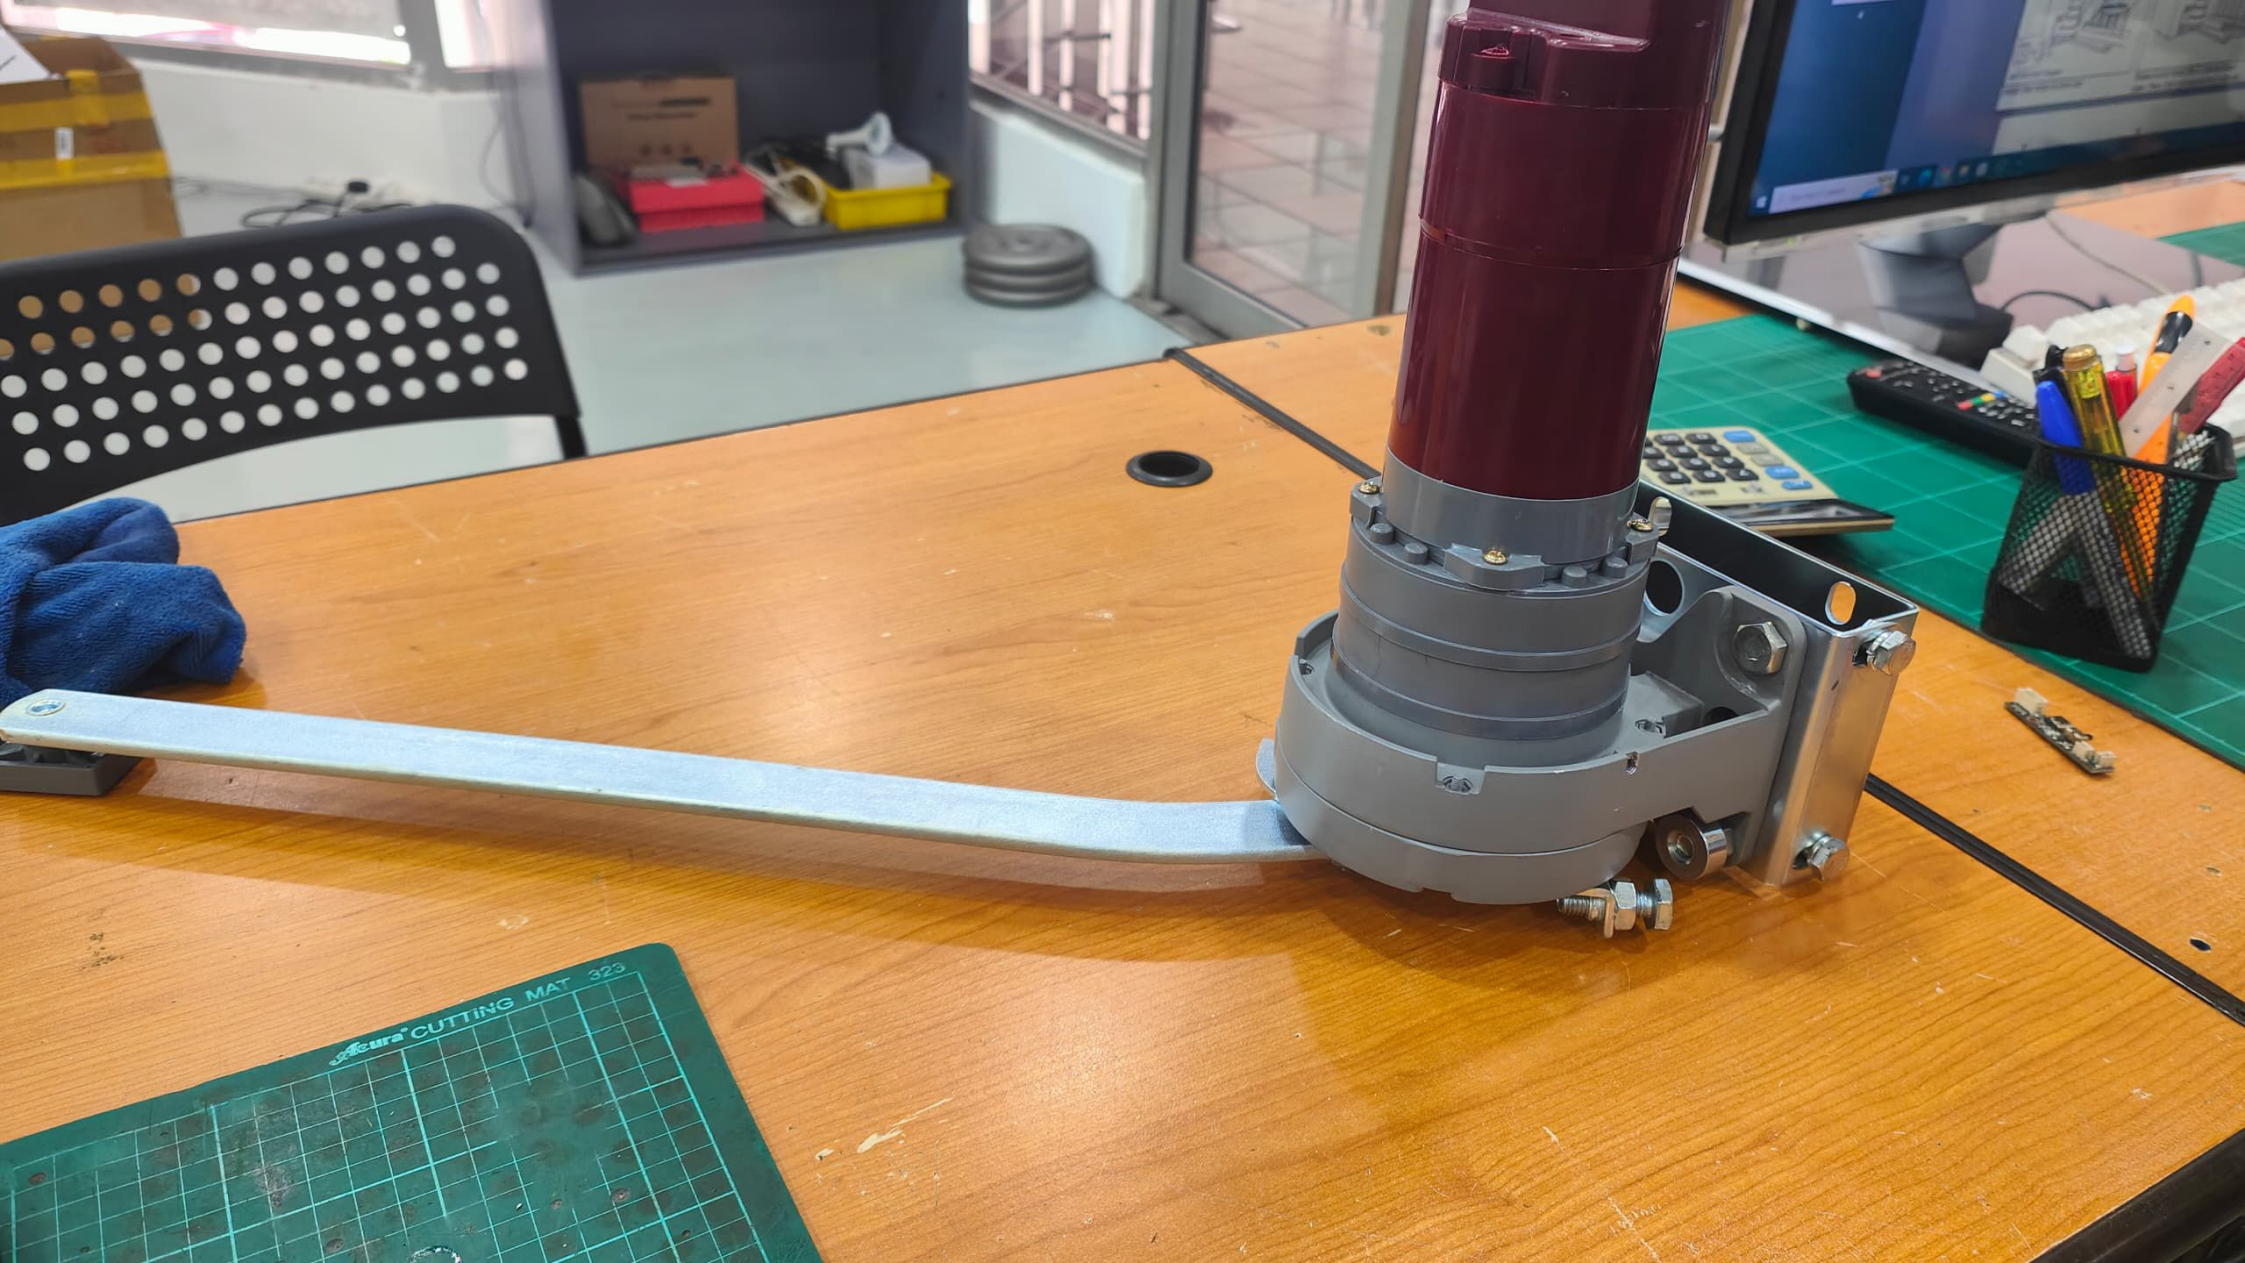

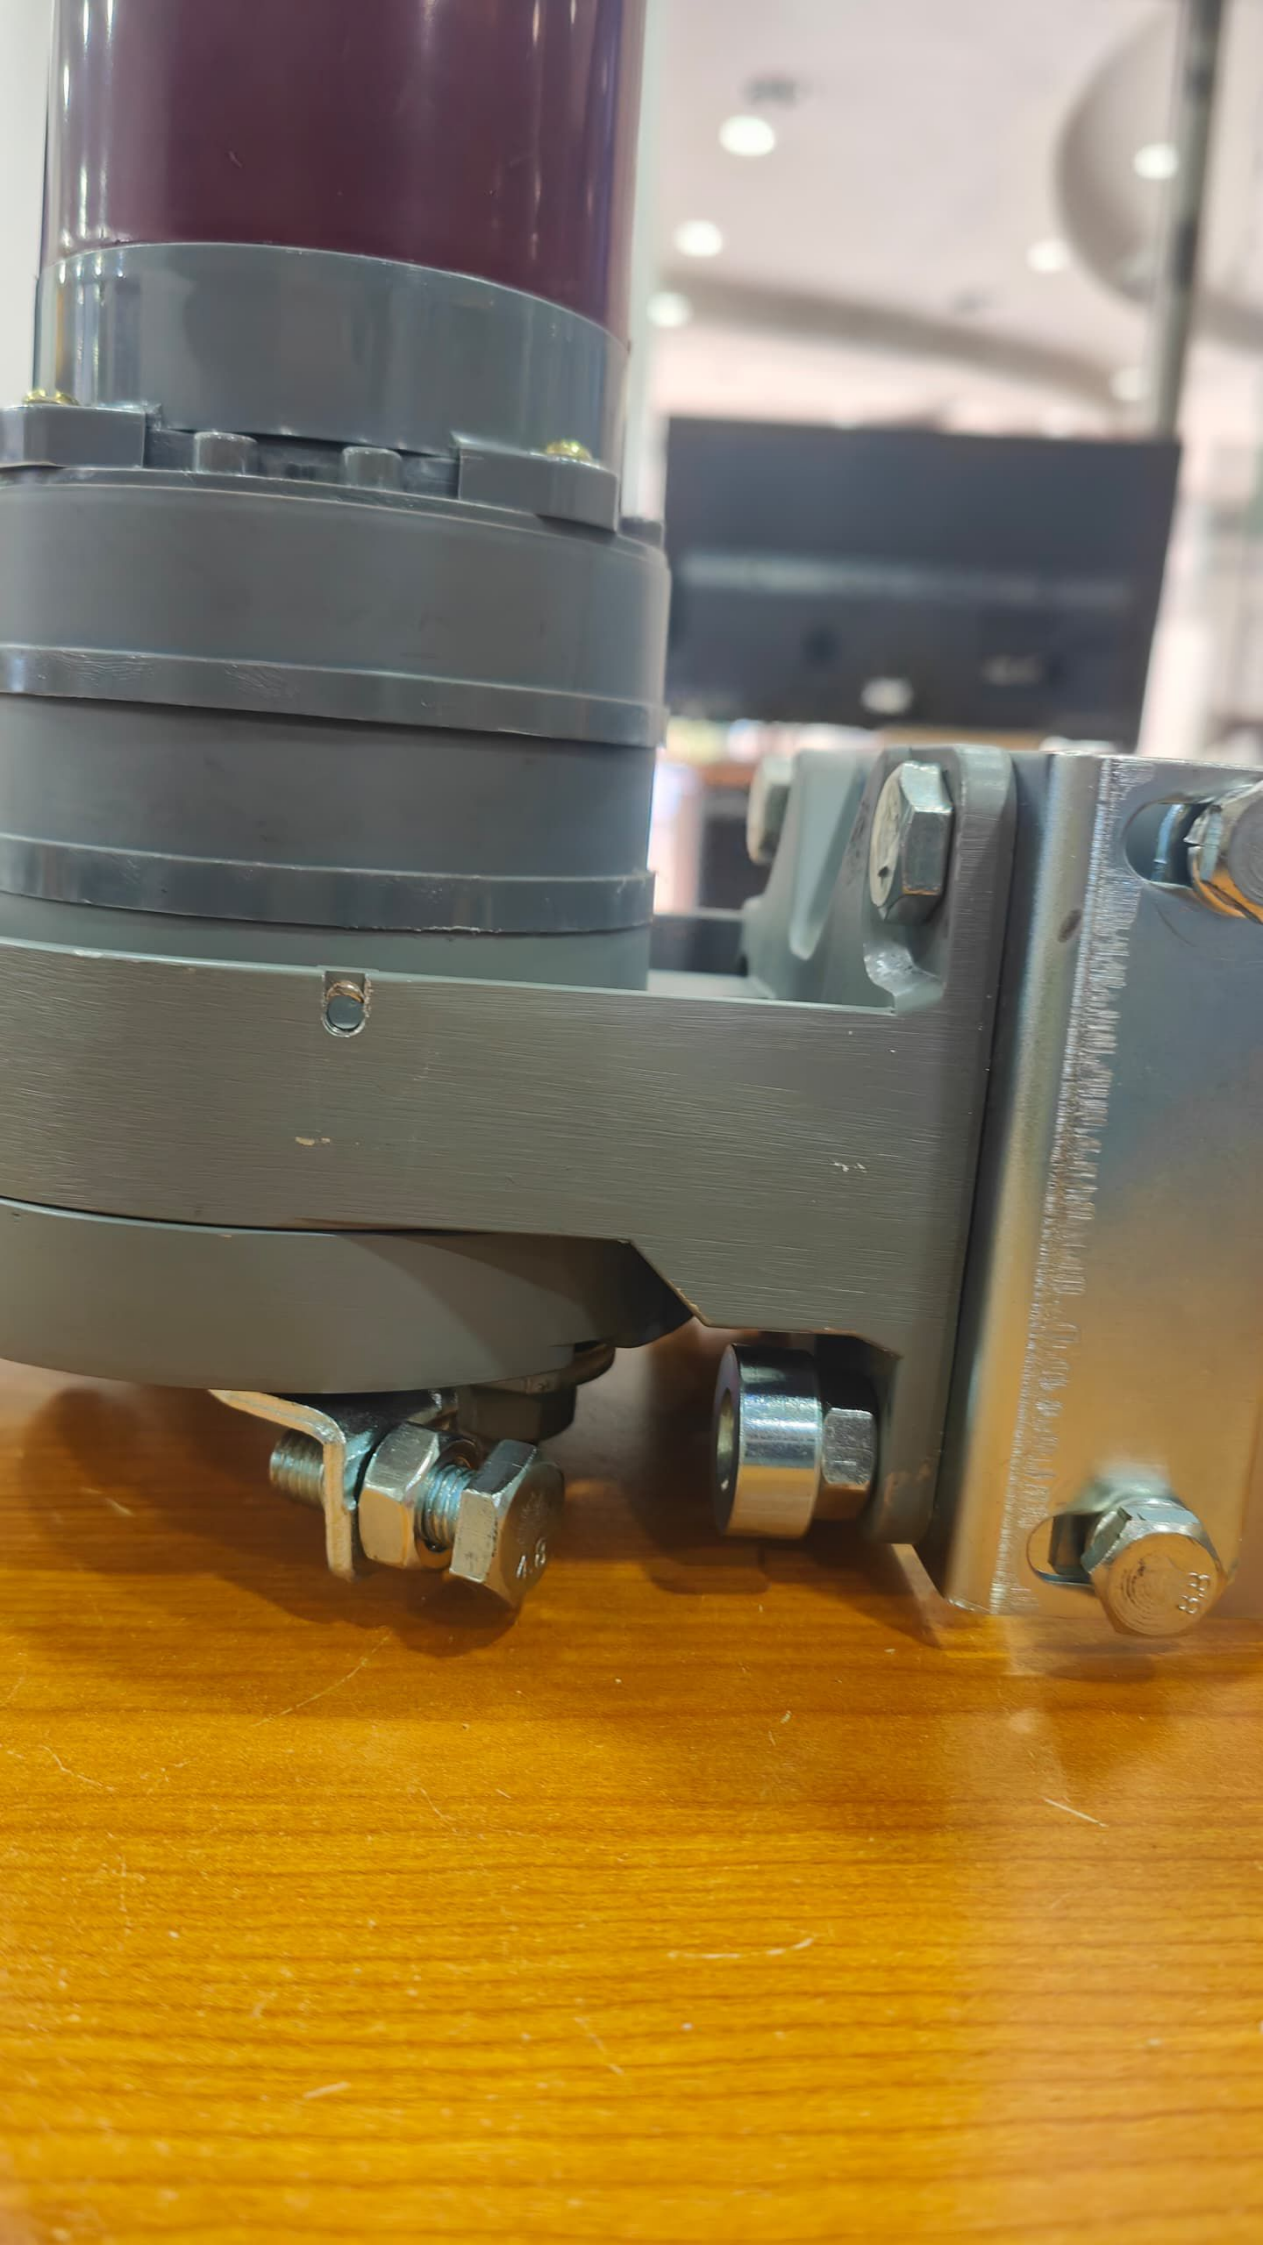

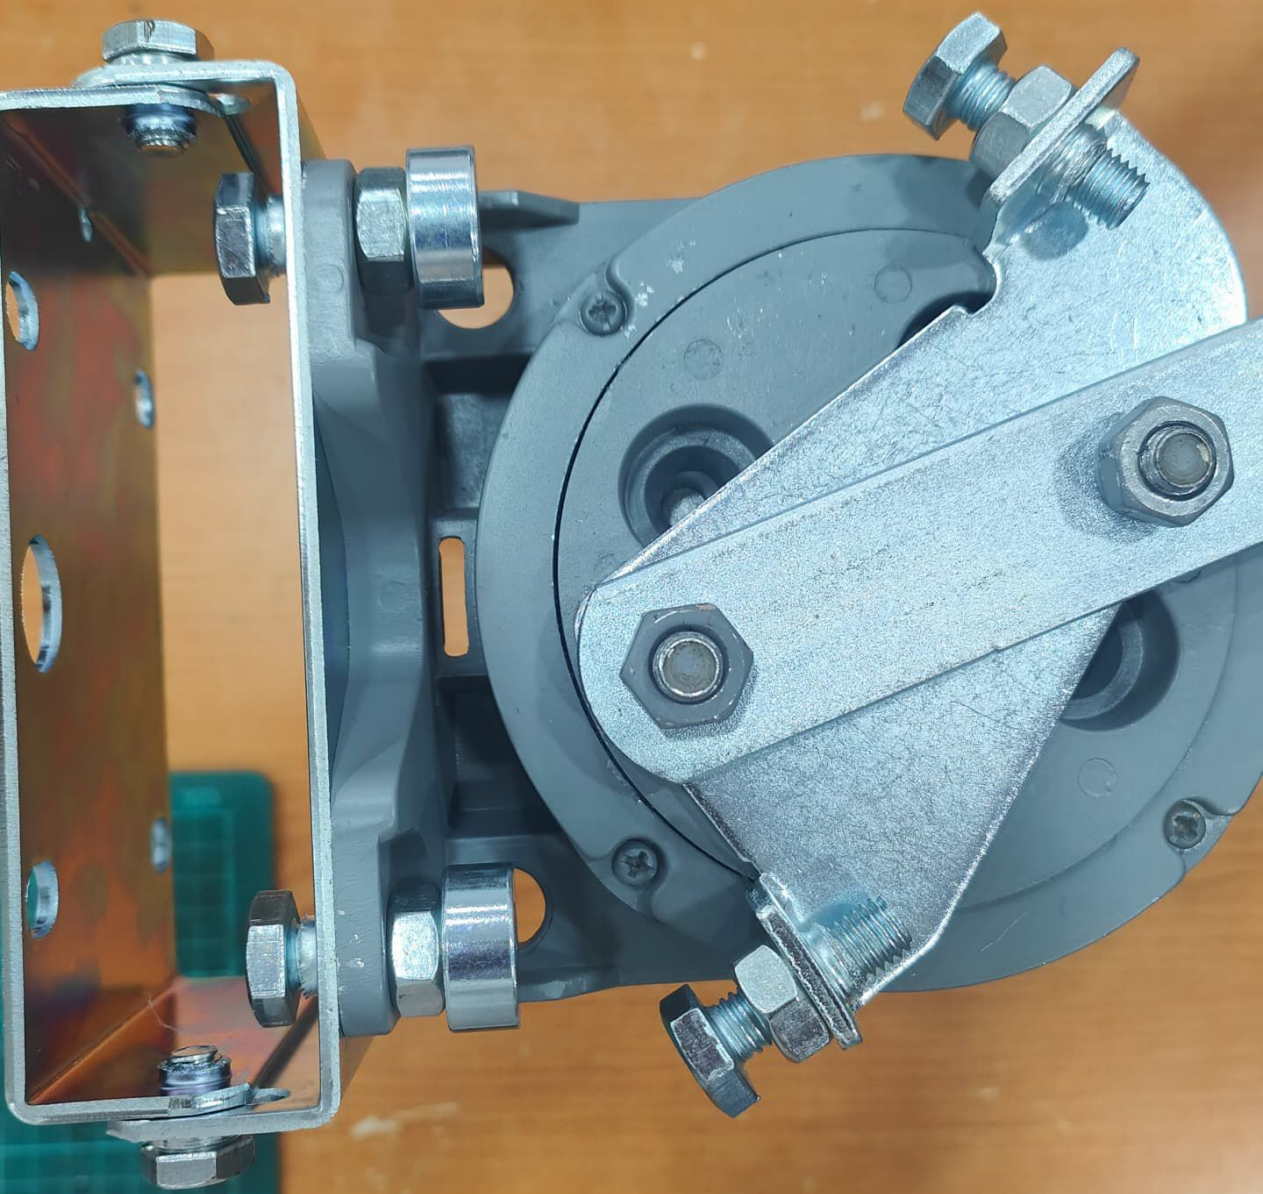


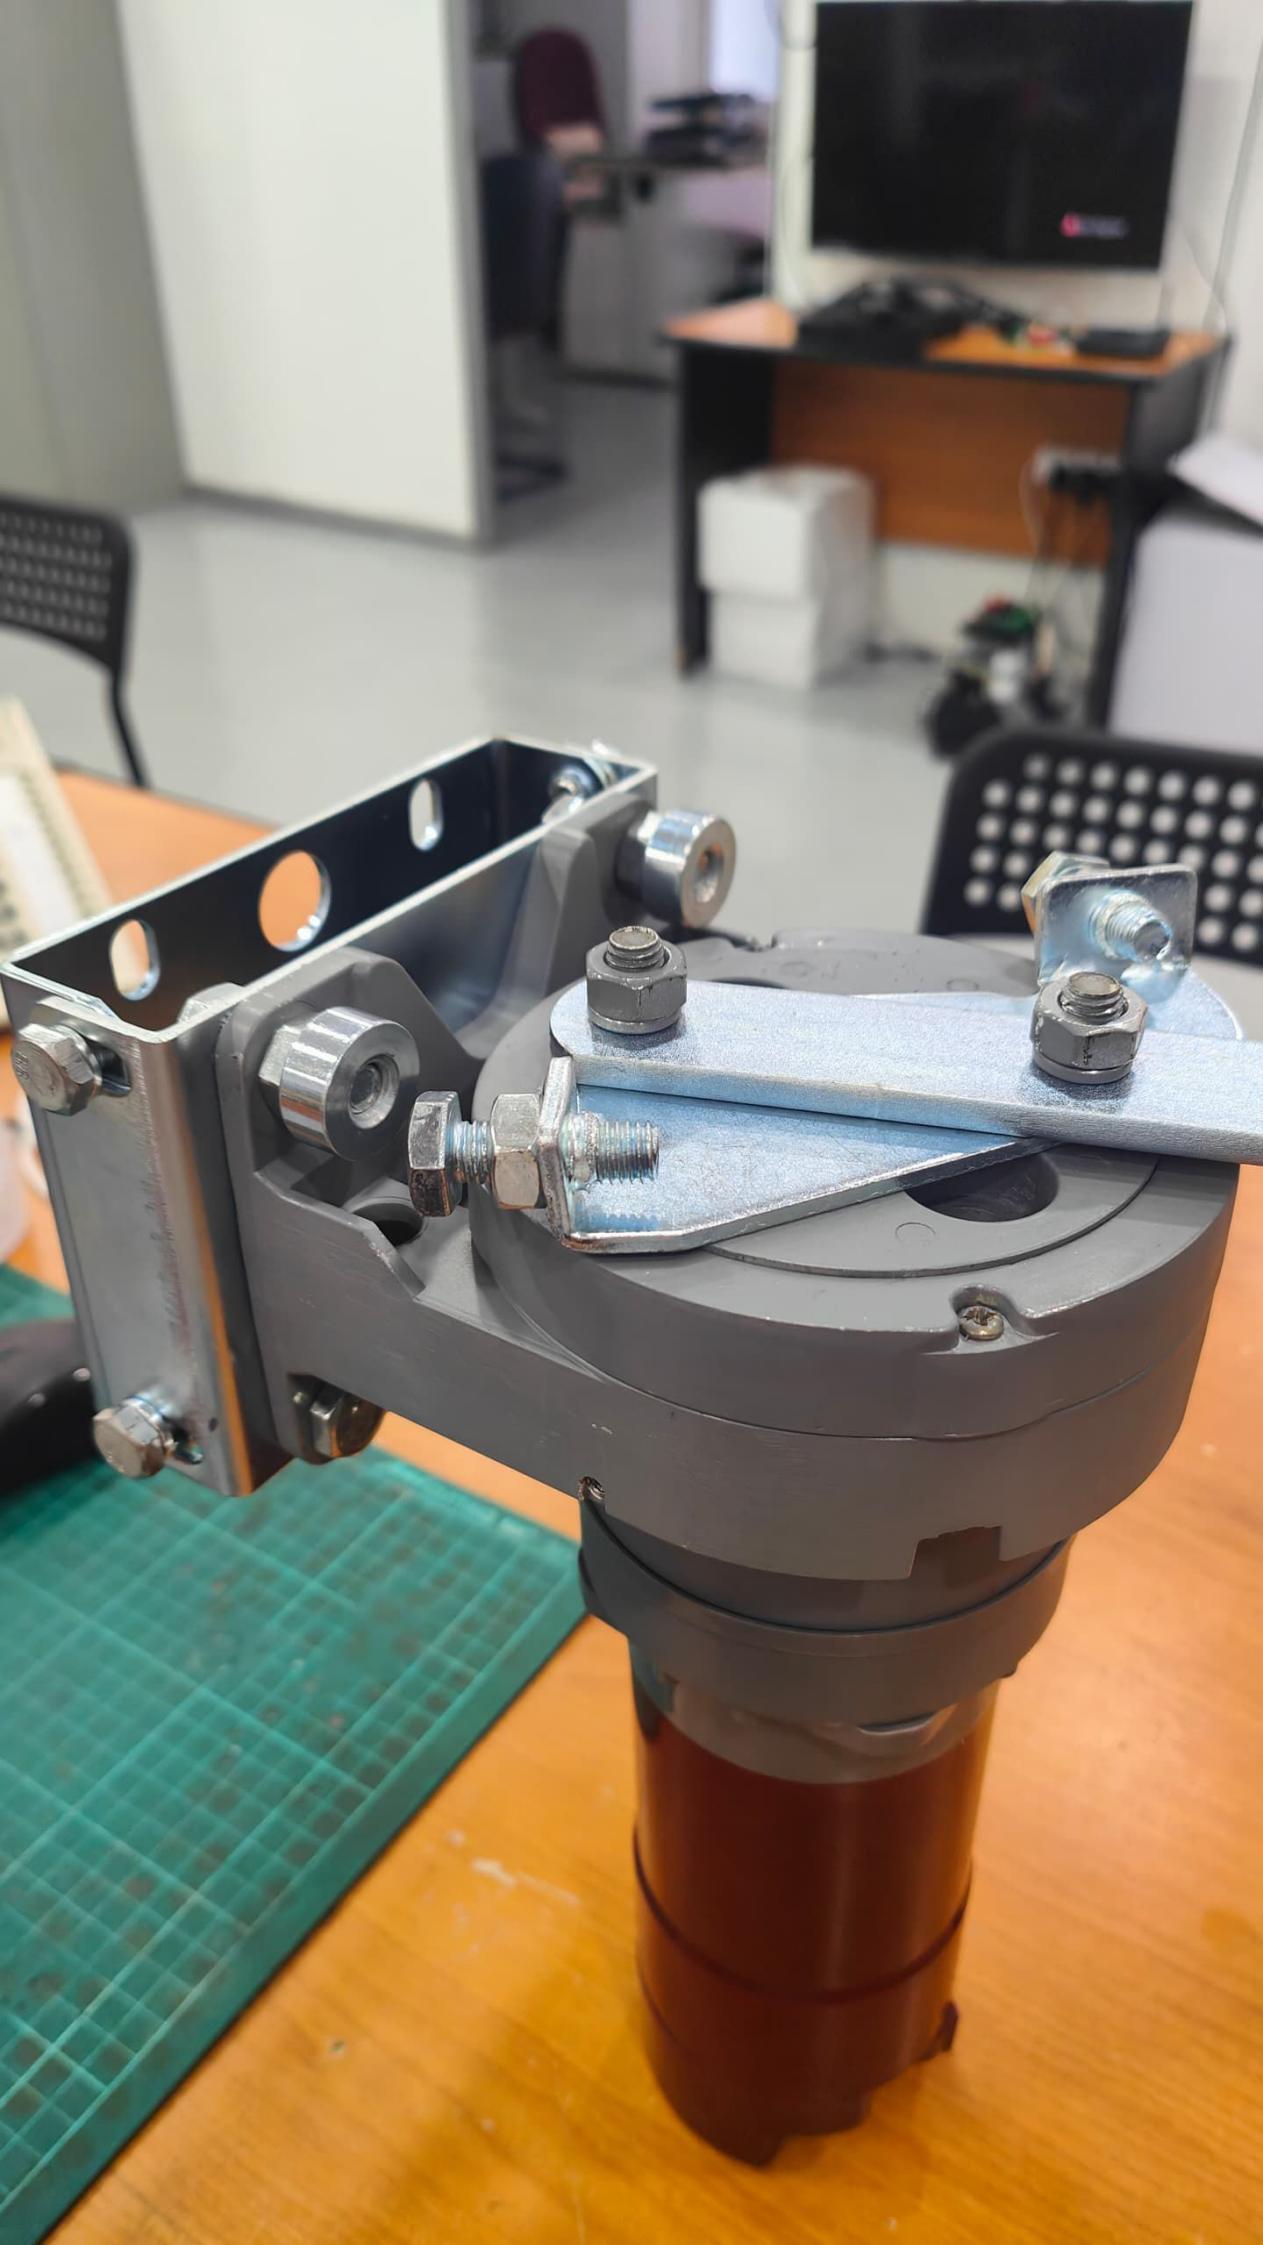

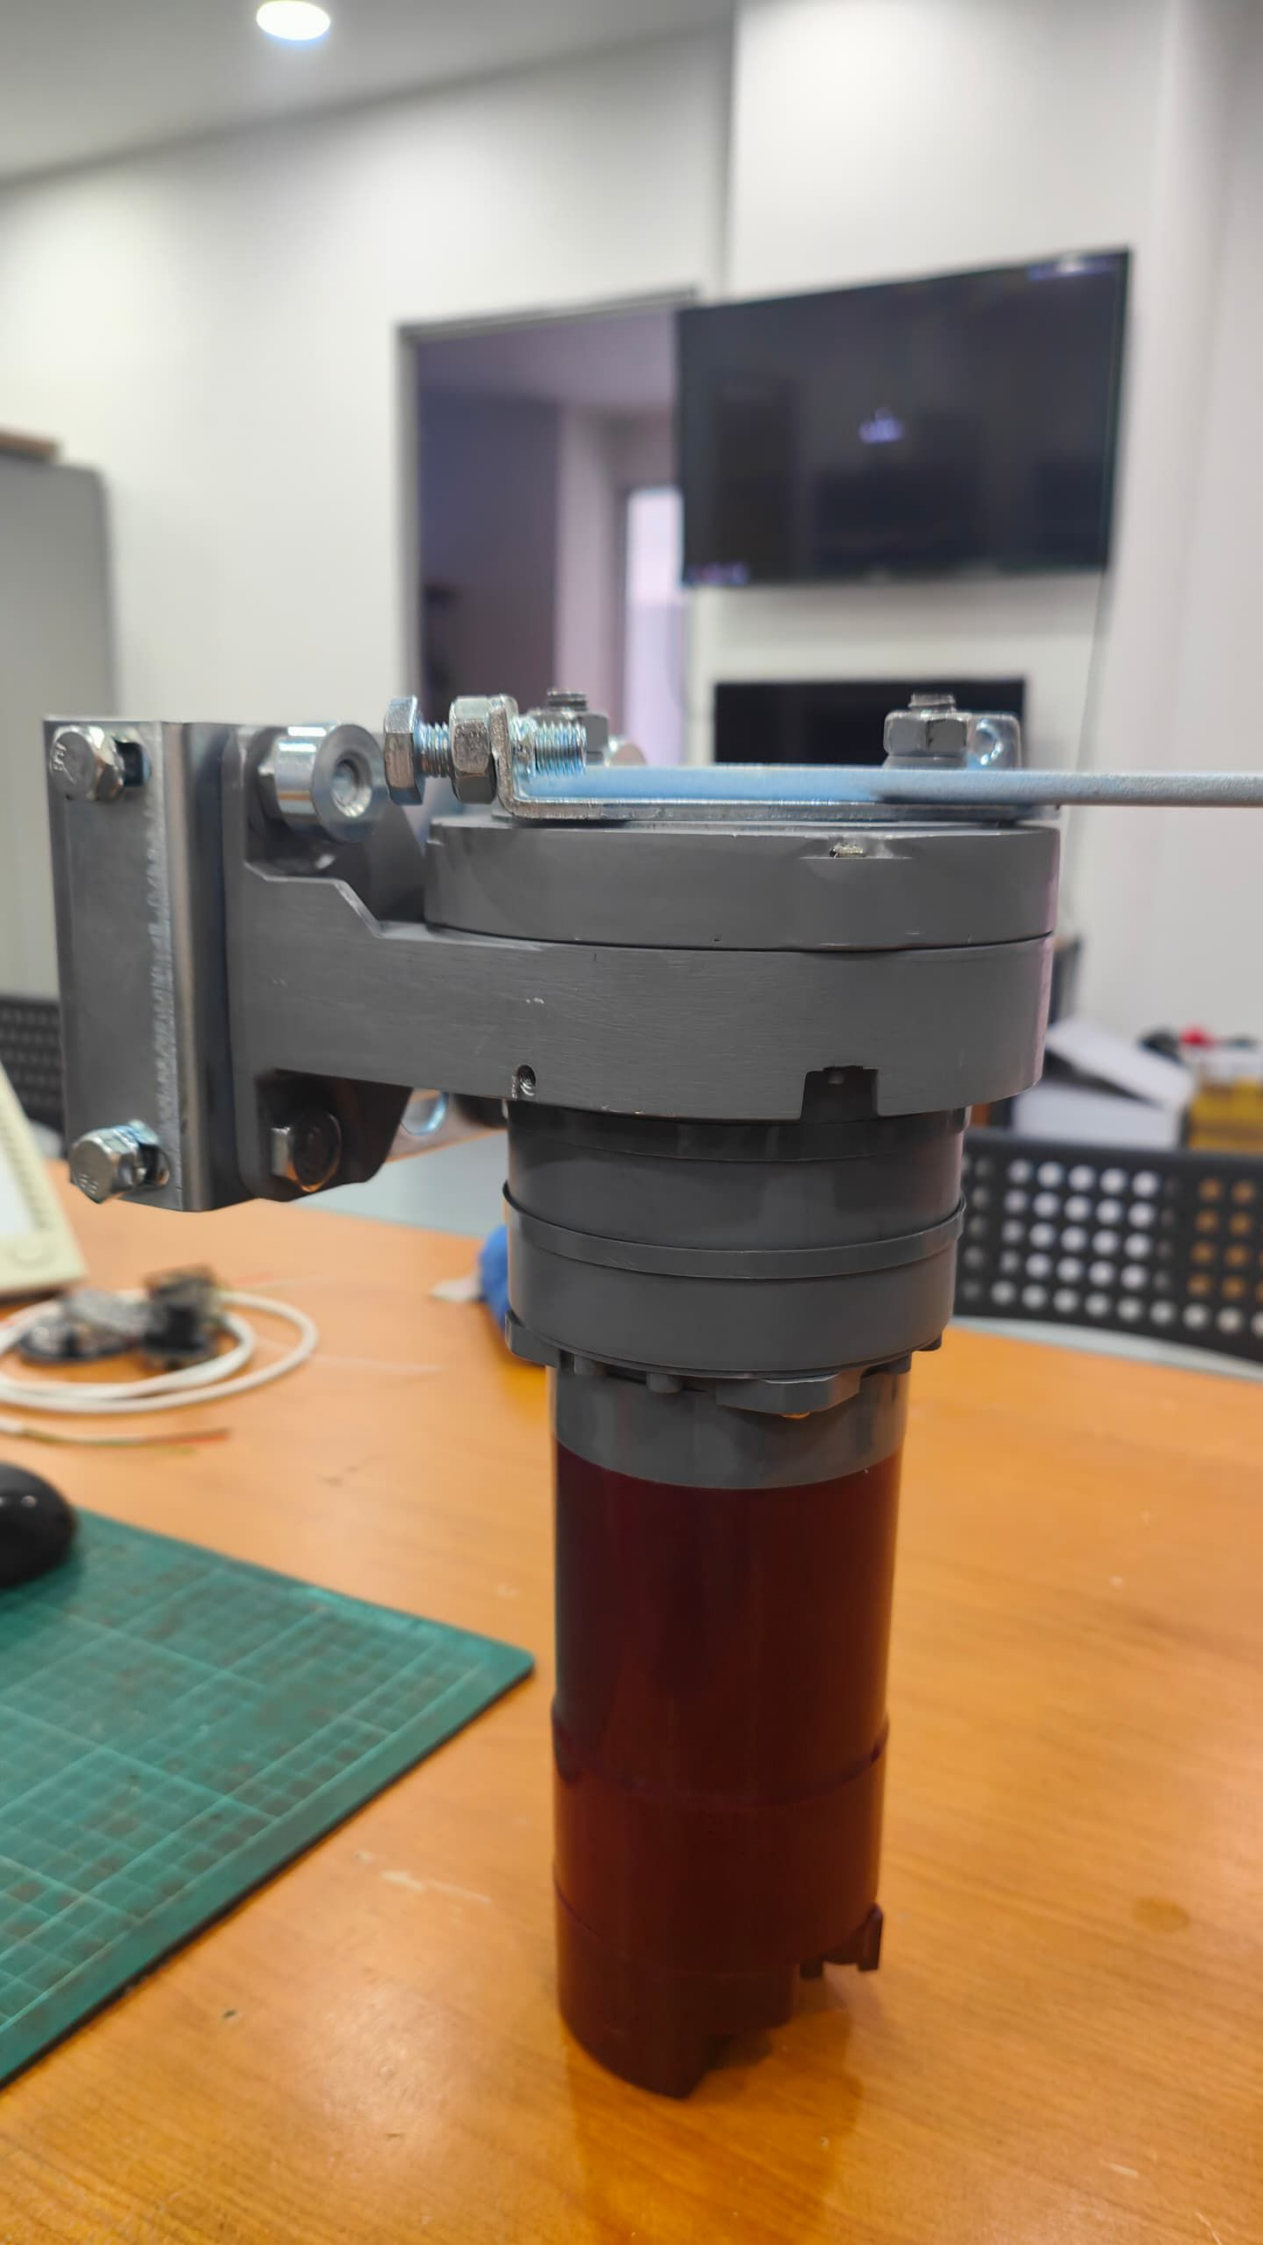



**click here to
watch VIDEO**

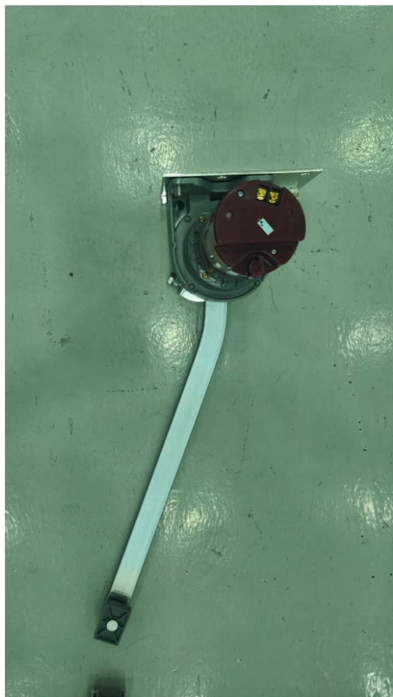


Left Motor



Full View


**X7 MOTOR
INSTALL POSITION**

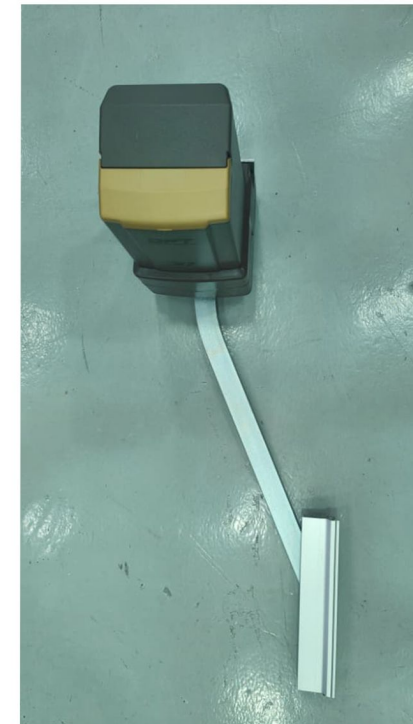

Right Motor



Left Motor Bottom View

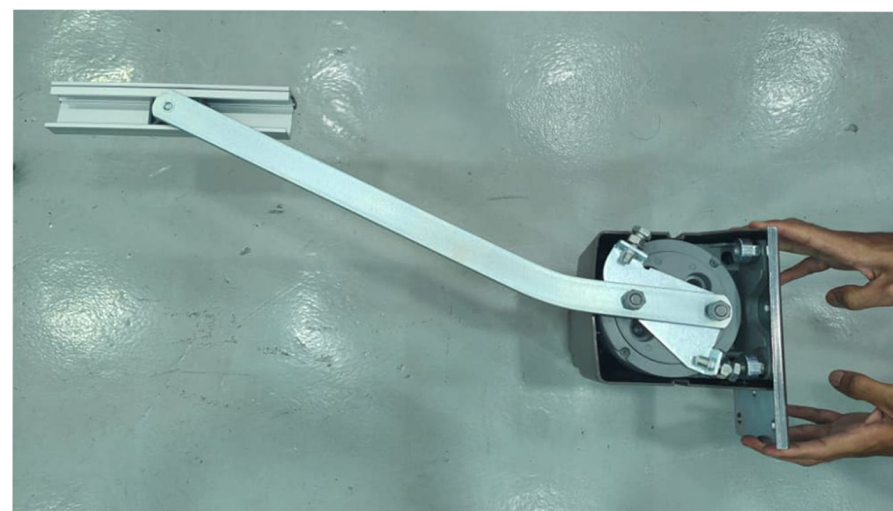

Right Motor Bottom View