
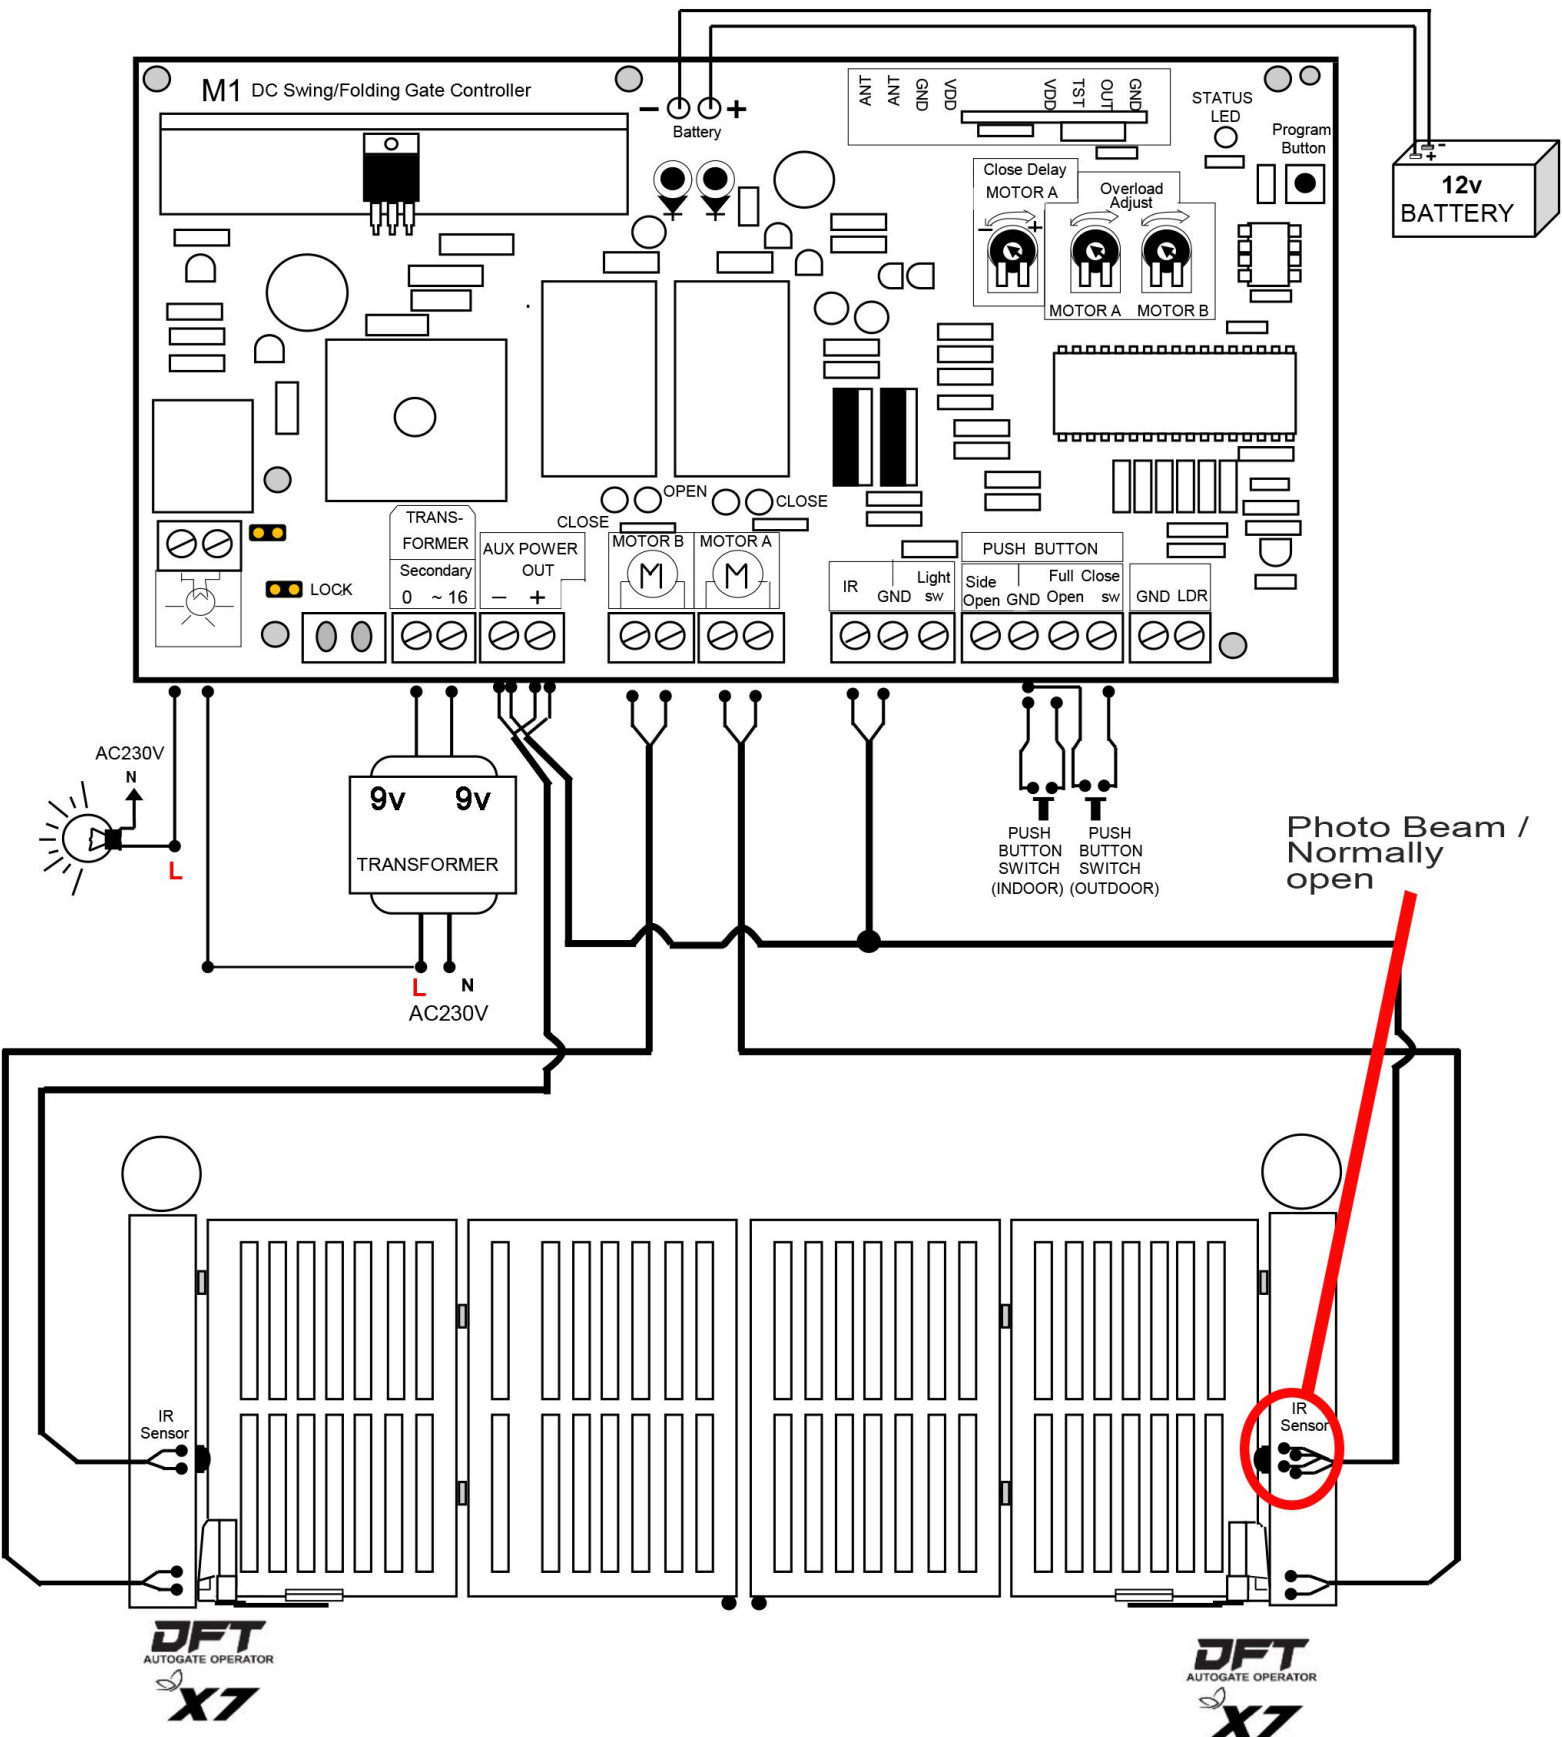


WIRING DIAGRAM FOR FOLDING/SWING MOTOR WITH M1 CONTROL PANEL

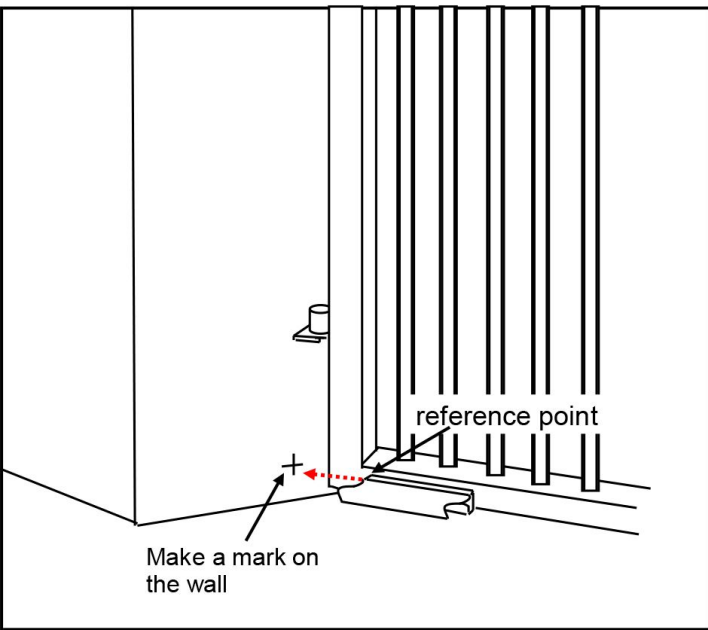


Remote Control Programming Method :



- 1) To Program - Press the " **Program Button** " switch x1 time ,the GREEN LED will ON ,
Then Press the Remote Control (any button), GREEN LED will Blinking
- 2) To Erase - Press and hold the " **Program Button** " switch , 5 -6 second until the LED blinking.

1


Make a mark on the wall by using the C-channel+base plate

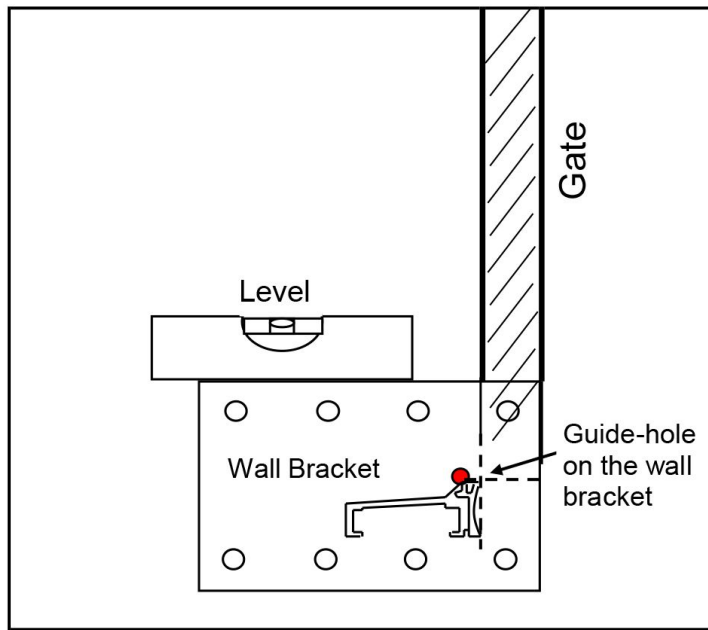2


Align the wall bracket guide-hole with the marking point

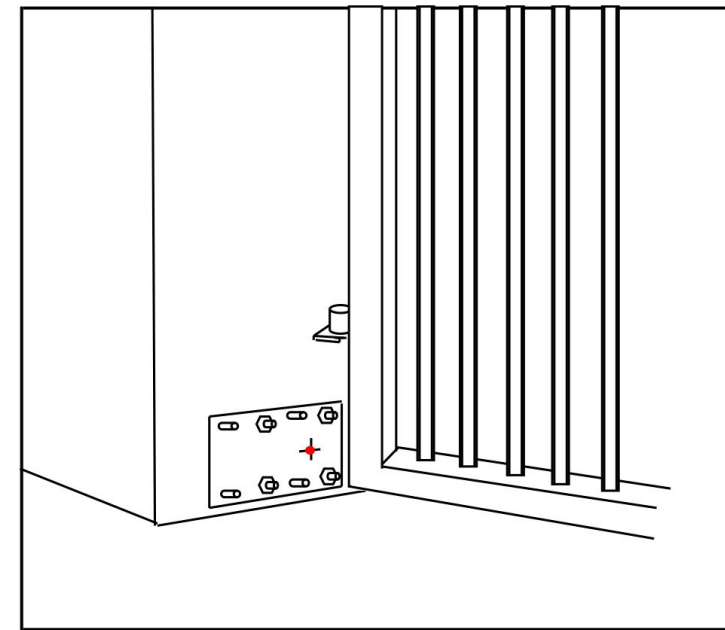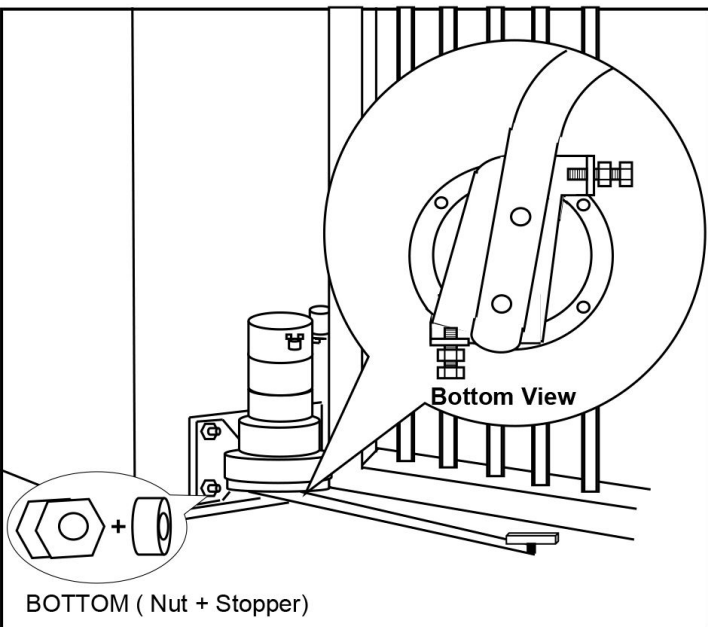3**4**


Install the motor & drive bar

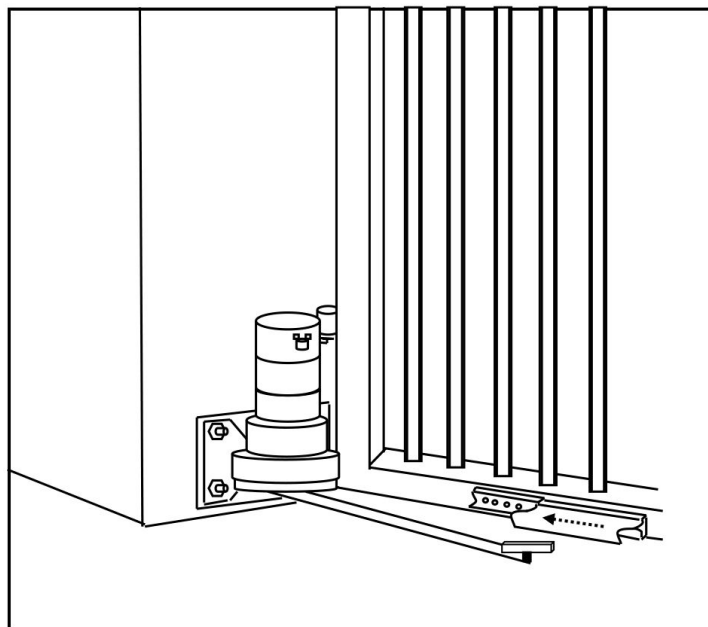5

Measure and install the C-channel base plate. Then, Slot in & secure the C-channel

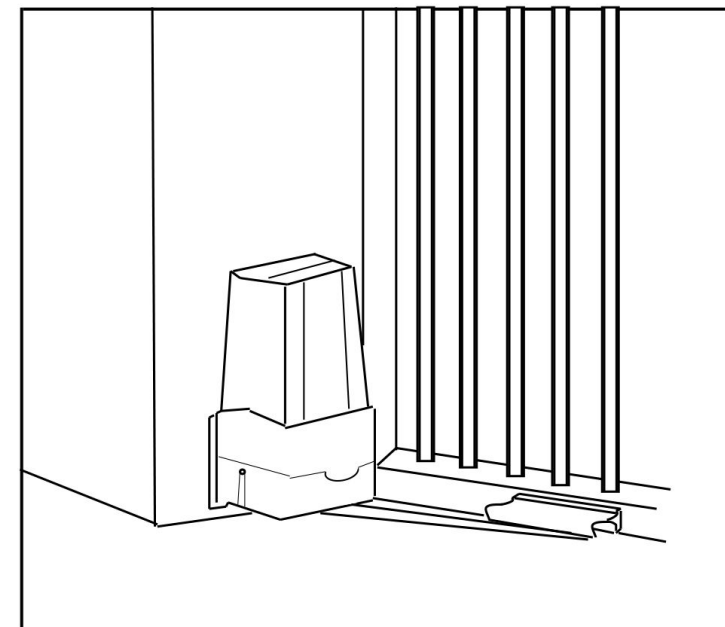
6

1

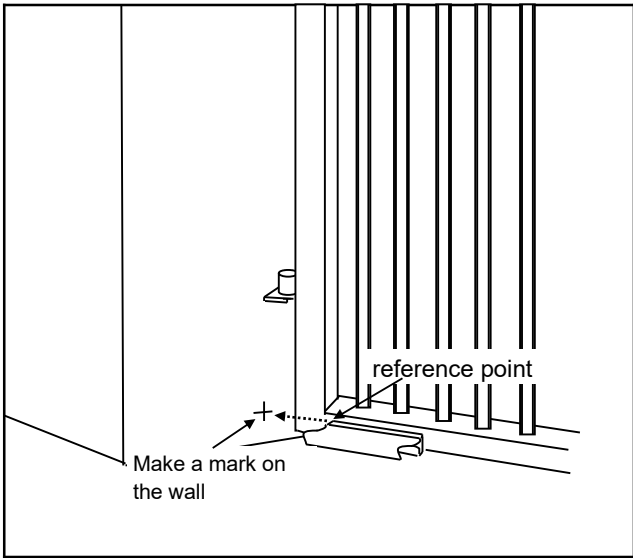


Make a mark on the wall by using the C-channel+base plate

2

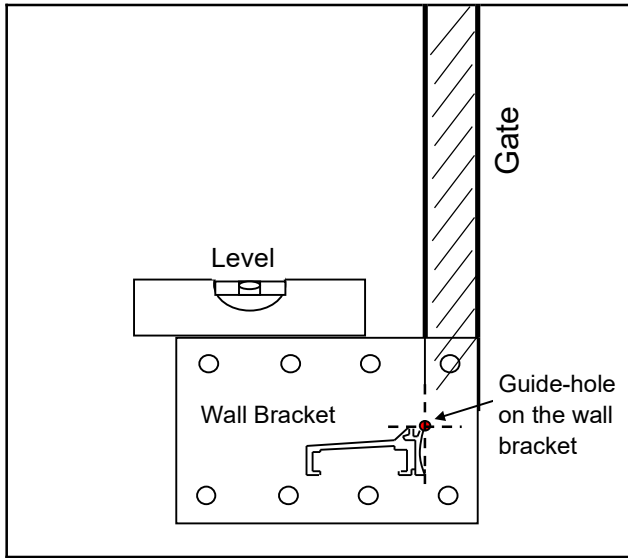


Alignment of wall bracket guide-hole with the marking point

3

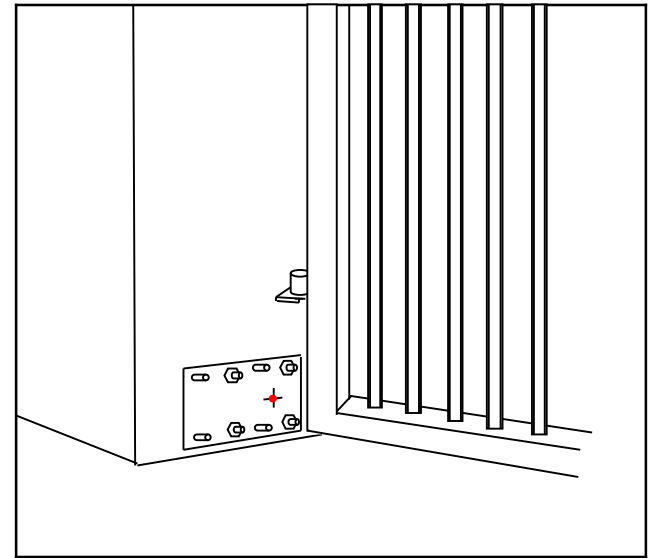


4

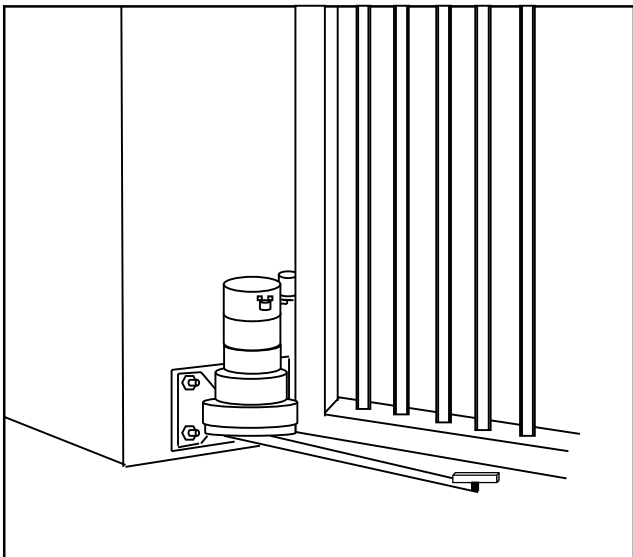


Install the motor & drive bar

5

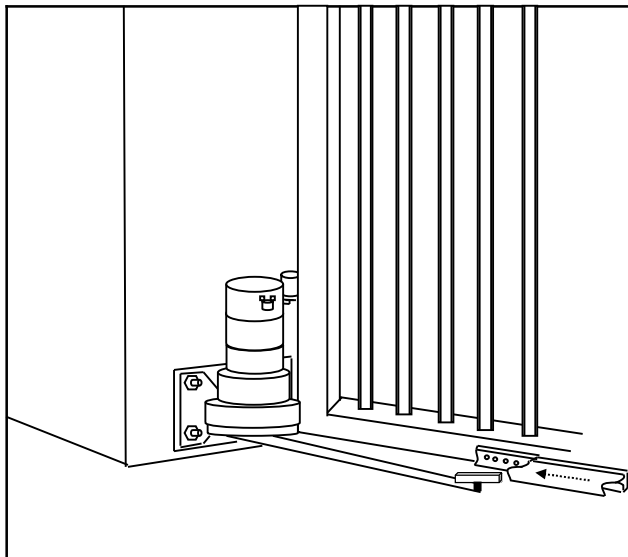

Measure and install the C-channel base plate. Then, Slot in & secure the C-channel

6

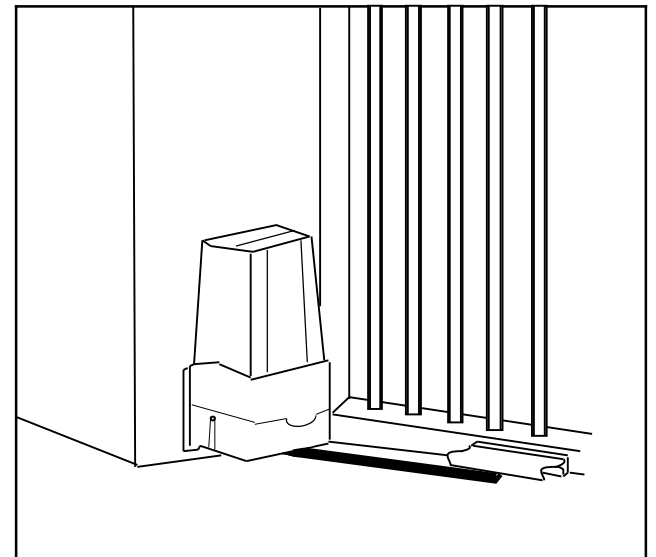

|