

5MP Coaxial Audio

Dual-light Bullet Coaxial Camera EQY Series


AHC-EQY5350PTC-T-IR2R-AT

Introduction




AHC-EQY5350PTC-T-IR2R-AT is a Dual-light Bullet Coaxial Camera, suitable for places with low or no light conditions and high definition image quality, such as roads, warehouses, underground parking lots, bars, pipelines, parks, etc.

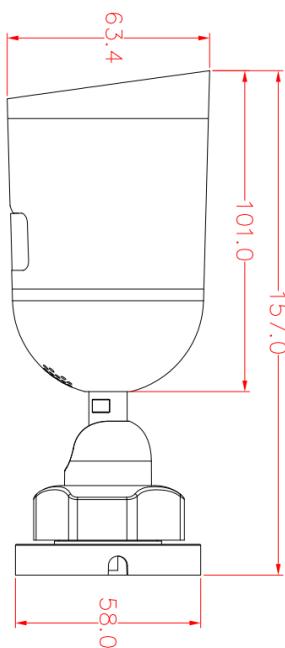

Dimension



Main Features

-  HD Lens
-  Coaxial control
-  Coaxial Upgrade
-  IP66
-  Multiple signal outputs
-  Zero Delay
-  Electronic Shutter
-  ICR
-  Double light alert
-  Coaxial audio

Product Parameters

Model **AHC-EQY5350PTC-T-IR2R-AT**

Camera

Sensor	1/3" low illumination CMOS sensor
Signal	AHD/TVI/CVI:5MP@20fps 5MP@12.5fps; CVBS:960H P/N
Min.illumination	Color:0.01Lux @(F1.2,AGC ON); 0 Lux with IR B/W: 0.001 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter time	1/50(1/60)s to 1/10,000 s
Lens	HD lens 2.8mm/6mm/3.6mm
Lens mount	M12
Day&night	IR cut filter with auto switch
Max resolution	2592*1944

General

Temperature	-10℃-+60℃
Humidity	10%-90% RH
Power supply	DC12V±10%
IR range	4* Double light "IR2":20-30 meters
Consumption	MAX 3W
Material	ABS+PC plastic
Ingress Protection	IP66
Weight	Around 300g
Dimension	Φ63.37mm*157.2mm

Compression

Video output	1Vp-p Composite Output(75Ω/BNC)
Audio I/O	1/1, Support coaxial audio